

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


RoHS Compliant ✔


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3715: REMOVE "UL TYPE CM", NEW FORMAT	11/18/08	D.FRISIELLO
F	ECN 3835: ADDED .5 M LENGTH AND NEW FORMAT	2/10/09	D.FRISIELLO
G	ECN 5868: ADDED LENGTHS 03 M, 075 M, REVISED FORMAT & PACKAGING	12/8/11	D.FRISIELLO
H	ECN 6451: UPDATED LOGOS, NOTES, AND EXPOSED CONN. DIM.	10/10/12	D. DESJARDIN

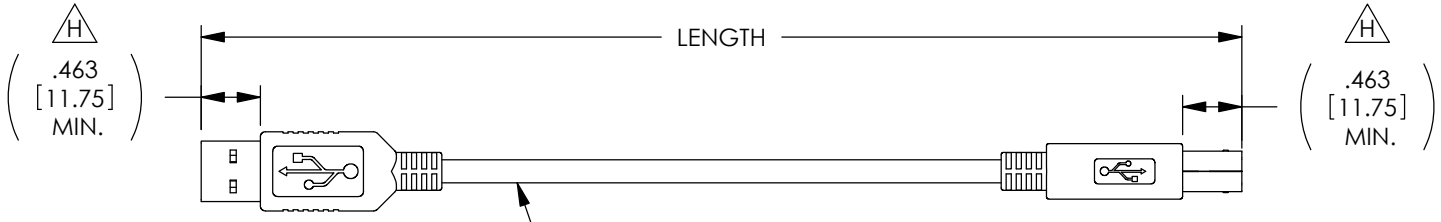



"P1"
SERIES "A" USB PLUG
CONTACTS: 30 µINCHES
GOLD PLATING

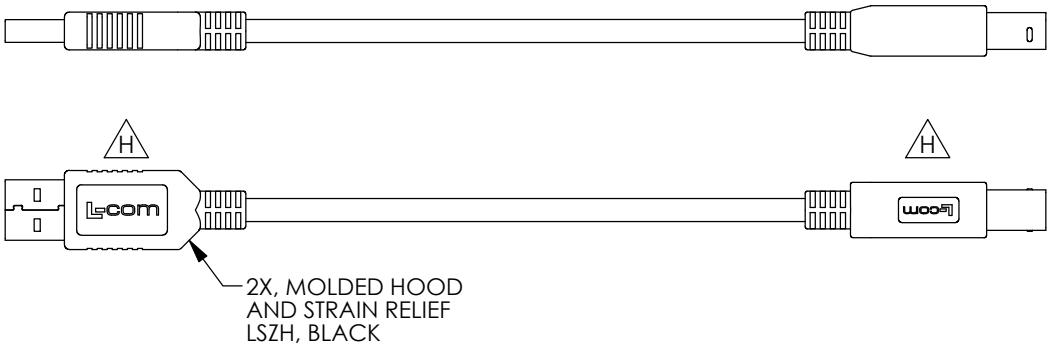




"P2"
SERIES "B" USB PLUG
CONTACTS: 30 µINCHES
GOLD PLATING

MODEL NUMBER	LENGTH METERS [FEET]
CSUZAB-03M	0.3 [.98]
CSUZAB-05M	0.5 [1.64]
CSUZAB-075M	0.75 [2.46]
CSUZAB-1M	1.0 [3.28]
CSUZAB-2M	2.0 [6.56]
CSUZAB-3M	3.0 [9.84]
CSUZAB-5M	5.0 [16.40]

"P1" WIRING DIAGRAM "P2"

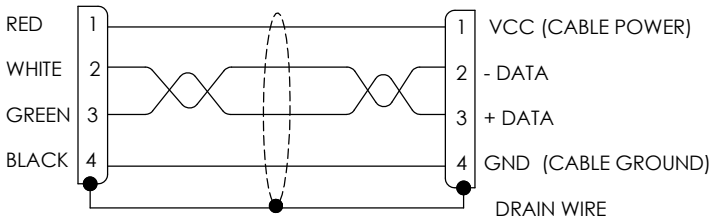

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS		DATE
DRAWN BY	C.MCCORMICK	11/24/2003
CHECKED BY	D.PARHAM	11/24/2003
APPROVED BY	B.MAZEJKA	11/24/2003

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CABLE, USB TYPE A/B, LSZH

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CSUZAB	H

SCALE: NONE | CAD FILE: CSUZAB.SLDDRW | SHEET 1 OF 1