rotronic

Datenblatt - Fiche technique - Data sheet

11.04.5450



ROLINE DVI-VGA-Kabel, DVI (12+5) ST – HD15 ST, 5,0m

ROLINE Câble VGA DVI, DVI (12+5) M / HD15 M, 5,0m

ROLINE DVI Cable, DVI (12+5) M – HD15 M, 5 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR # 081117-2 EDIT PACKING, ADD BARCODE LABEL	11/17/08'

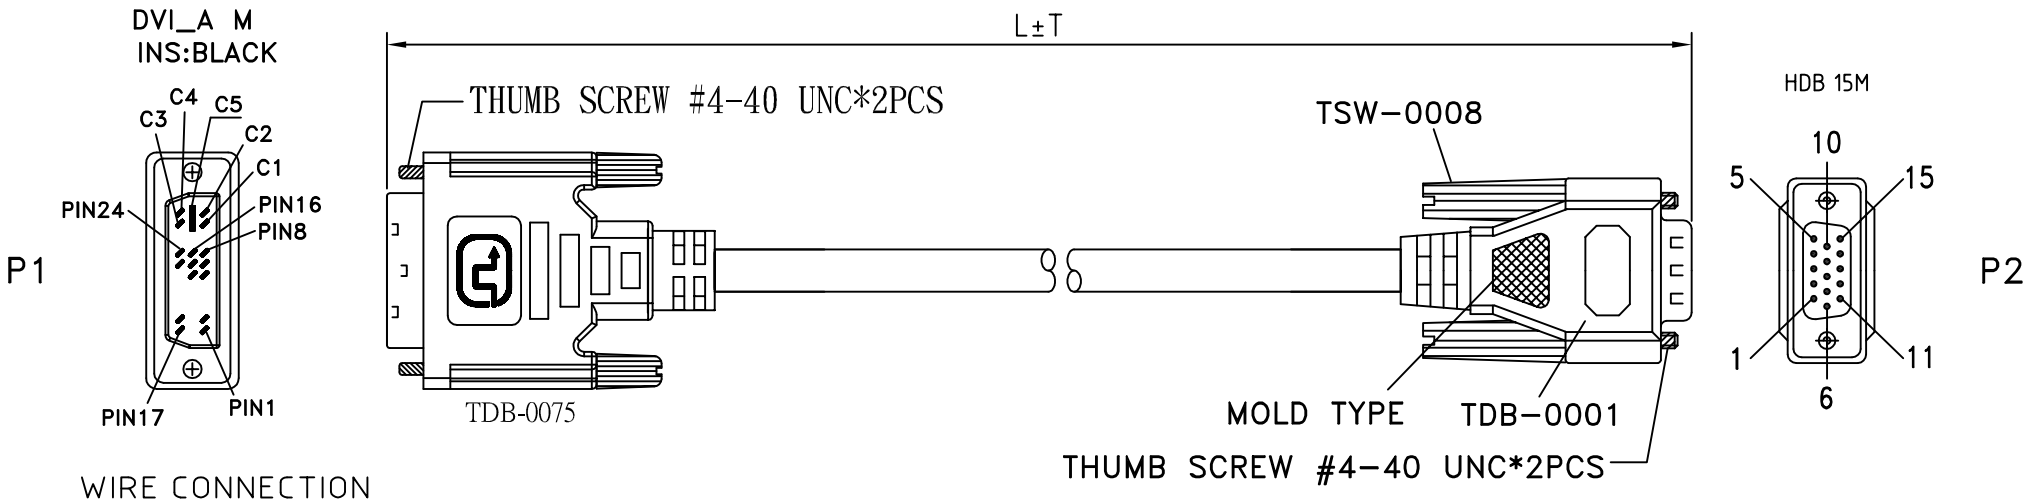

WIRE CONNECTION

P1	WIRE COLOR	P2
6		15
7		12
8		14
14,16		9
15		5,10
C1		1
C5		6
C2		2
C5		7
C3		3
C5		8
C4		13
SHELL	DRAIN WIRE	SHELL

REMARK:

1. CABLE: 30AWG(7/0.102)COAXIALx3C+28AWG(7/0.127)x5C+28AWG(7/0.127)x1PAIR+AL/MYLAR)
   PVC JACKET; COLOR:BLACK(NK-K01) OD:7.0±0.15mm UL 20276 APPROVED
2. CONNECTOR: P1: DVI_A MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
   P2: HDB 15P MALE GOLD FLASH CONTACT NICKEL PLATED SHELL
3. SHIELD: P1&P2 COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL &DRAIN WIRE
4. HOOD:
   P1&P2: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
6. TEST REQUEST:
   (1) 100% OPEN SHORT & MIS WIRE TEST
   (2) CONTACT RESISTANCE 3 OHM MAX
   (3) INSULATION RESISTANCE 10M OHM MIN
   (4) HI-POT VOLTAGE 300V DC
7. PACKING:EACH PC / POLYBAG + HEADER CARD(ROLINE,
   SIZE:205×84mm) + BAR CODE LABEL. 1

DWG	P/N	L(mm)	T(mm)	PCS/CTN	BAR CODE 1
200-0832-3	11.04.5450	5000	50	10	7611990142040
200-0832-2	11.04.5430	3000	30	20	7611990133178
200-0832-1	11.04.5420	2000	30	25	7611990133161

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw FANNIE 11/17/08'
Check
Engr

Rotronic Co., Ltd.

Title: DVI_A - VGA CABLE
Customer P/N
App'd
Customer T-RAG
Scale NONE Units m/m Third Angle Projection
Dwg No. 200-0832 REV:B Sheet 1/1