
ø 4



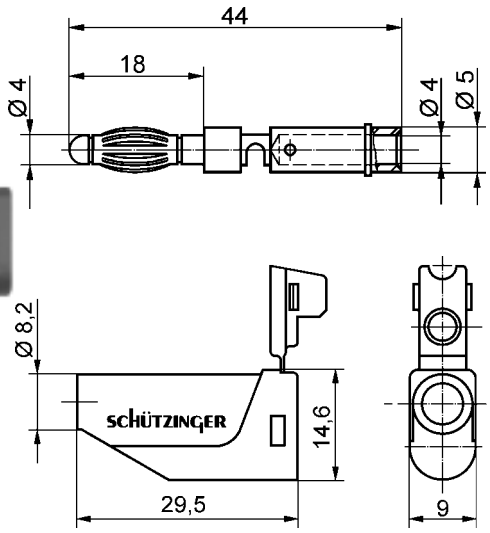


Lamella-basket plug
- soldering terminal
- with line in socket
- with sleeve, unassembled

order no. **FK 15 L / 1 / ..**(colour)
- contact parts **nickel-plated**
- sleeve PE (Hostalen)

for wire square-section up to **1 mm²**
for insulation diameter up to **4 mm**

colours: see table



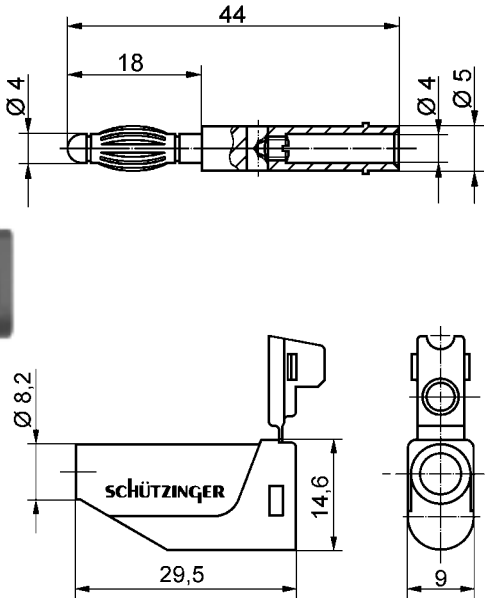

Lamella-basket plug
- screw terminal
- with line in socket
- with sleeve, unassembled

order no. **FK 15 S / 1 / ..**(colour)
- contact parts **nickel-plated**
- sleeve PE (Hostalen)

for wire square section up to **1 mm²**
for insulation diameter up to **4 mm**

order no. **FK 15 S / 0,5 / ..**(colour)
- as above, but
- sleeve PE (Hostalen)

for wire square section up to **0.5 mm²**
for insulation diameter up to **2 mm**

colours: see table

General information			Technical data				
order no.	sleeve for lead	colours	terminal	transition resistance	rated voltage	rated current	operating temperature
FK 15 L / 1 / ..(colour) contact part nickel-plated	ø 4 mm	black red blue yellow green	soldering - 1 mm²	3 mΩ	30 V_{AC} 60 V_{DC}	16 A	- 25 °C ... + 110 °C
FK 15 S / 1 / ..(colour) contact part nickel-plated	ø 4 mm		screw - 1 mm²	3 mΩ	30 V_{AC} 60 V_{DC}	16 A	- 25 °C ... + 110 °C
FK 15 S / 0,5 / ..(colour) contact part nickel-plated	ø 2 mm		screw - 0.5 mm²	3 mΩ	30 V_{AC} 60 V_{DC}	10 A	- 25 °C ... + 110 °C

other colours and platings on request