HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS® SKS Kontakttechnik GmbH

Test probes

MPS 1



CE

Product	MPS 1
description	…
operating instruction	BA209
article-no. / *colour	9735311xx 00 black 01 red Ni
drawing	
	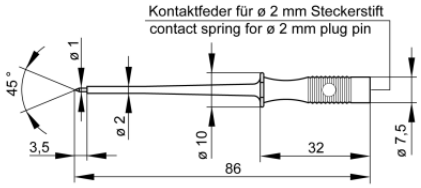
technical data	
connection	spring loaded socket 2 mm
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	1 A
material socket	brass, nickel plated
housing material	PE
temperature range acc. To IEC61010(2)	-25 °C to +60 °C
standard	IEC 61010

2 mm system

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 19.06.2019