002 PCB TERMINAL BLOCKS
081 TERMINAL STRIPS
095 WIRE TO BOARD CONNECTORS
100 CIRCULAR CONNECTORS
151 IP68 CONNECTORS
158 INTERFACE MODULES AND RELAY BASES

High temperature resistant connection blocks

Product overview

- Porcelain body rated to 1000°C
- Inserts rated to 350°C
- 1 to 4 poles available
- 3, 3.5, 4.4 and 6mm insert diameter sizes
- CE approved

SPECIFICATION		
Voltage (max)	1 Pole 2-4 pole	250V AC 450V AC
Working temperature	5°C to 350°C	
Insert	Nickel-plated brass	
Screws	Zinc-plated steel CQ-15	

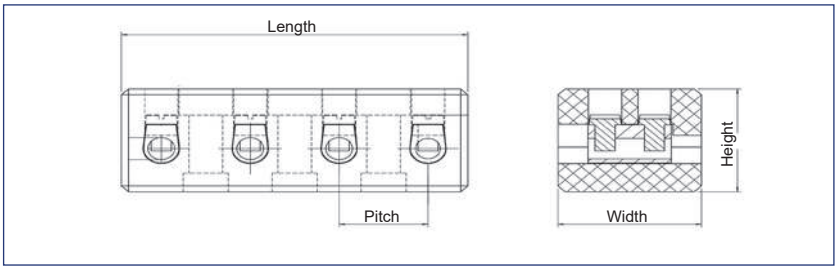

CHTB



POLES	POLES	MAX. CURRENT	INSERT DIAMETER	MAX. CONDUCTOR: RIGID	MAX. CONDUCTOR: FLEXIBLE	LENGTH	WIDTH	HEIGHT	MOUNTING HOLE SIZE DIAMETER	MOUNTING HOLE SIZE SCREW HEAD	TERMINAL: PITCH	SCREWS
CHTB4/1N	1	32A	3mm	4mm²	4mm²	10mm	18mm	17mm	N/A	N/A	N/A	M2.6
CHTB4/2N	2	32A	3mm	4mm²	4mm²	21.5mm	18mm	17mm	4.5mm	6.9mm	11.5mm	M2.6
CHTB4/3N	3	32A	3mm	4mm²	4mm²	33mm	18mm	17mm	4.5mm	6.9mm	11.5mm	M2.6
CHTB4/4N	4	32A	3mm	4mm²	4mm²	44.5mm	18mm	17mm	4.5mm	6.9mm	11.5mm	M2.6
CHTB6/1N	1	41A	3.5mm	6mm²	4mm²	11mm	20mm	17.5mm	N/A	N/A	N/A	M3
CHTB6/2N	2	41A	3.5mm	6mm²	4mm²	23.5mm	20mm	17.5mm	4.5mm	7.5mm	12.5mm	M3
CHTB6/3N	3	41A	3.5mm	6mm²	4mm²	36mm	20mm	17.5mm	4.5mm	7.5mm	12.5mm	M3
CHTB6/4N	4	41A	3.5mm	6mm²	4mm²	48.5mm	20mm	17.5mm	4.5mm	7.5mm	12.5mm	M3
CHTB10/1N	1	57A	4.4mm	10mm²	6mm²	12mm	22mm	18mm	N/A	N/A	N/A	M3.5
CHTB10/2N	2	57A	4.4mm	10mm²	6mm²	26mm	22mm	18mm	5mm	8.5mm	14mm	M3.5
CHTB10/3N	3	57A	4.4mm	10mm²	6mm²	40mm	22mm	18mm	5mm	8.5mm	14mm	M3.5
CHTB10/4N	4	57A	4.4mm	10mm²	6mm²	54mm	22mm	18mm	5mm	8.5mm	14mm	M3.5
CHTB16/1N	1	76A	6mm	16mm²	10mm²	16mm	30mm	23mm	N/A	N/A	N/A	M4
CHTB16/2N	2	76A	6mm	16mm²	10mm²	34mm	30mm	23mm	5mm	9mm	17.5mm	M4
CHTB16/3N	3	76A	6mm	16mm²	10mm²	52mm	30mm	23mm	5mm	9mm	17.5mm	M4
CHTB16/4N	4	76A	6mm	16mm²	10mm²	70mm	30mm	23mm	5mm	9mm	17.5mm	M4

+44 (0)1638 716101 | sales@camdenboss.com | www.camdenboss.com

We operate a constant improvement policy, our products are subject to change without notice.

Vers 4

bsi ISO 9001 Quality Management Systems CERTIFIED
FM 28614