Standards
IEC 61010-031

M-952271

Intervention cable on LV panel

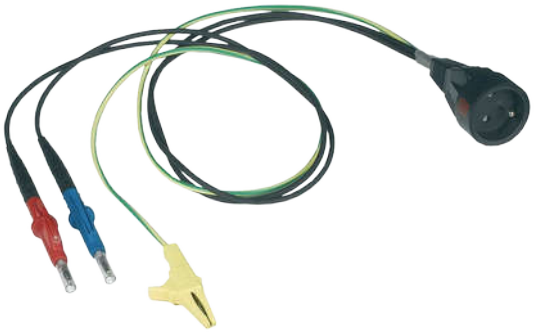

Application:

- Accessory for connecting Catex[tm] and Catohm[tm] control devices to Low Voltage electrical panels.

Features:

- Earthing connection via alligator clip.
- Safety test probe with retractable sleeve.
- Female socket standard 2P+T.

Composition:

- 2 x blue and red IP2X lead tests, cord 0.85 m.
- 1 x IP2X alligator clamp on green/yellow, cord 0.85 m.
- 1 x moulded 2 P+T male outlet.
- Marking by 2 coloured dots (blue and red) on the male plug.

Ref	Voltages for use
	Operating Voltage AC
M-952271	1000 V

CATU S.A.S. - 10, Avenue Jean-Jaurès - B.P.2 - 92222 Bagneux Cedex
France
Phone : +33 1 42 31 46 00 - Fax : +33 1 42 31 46 32