MURR ELEKTRONIK
stay connected

SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE

24V LED+Z-Diode M16x1.5

Form BI (11 mm)
24 V AC ±20% / DC ±25%
LED and Z-diode
metric

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product


Illustration

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20


MURR ELEKTRONIK
stay connected



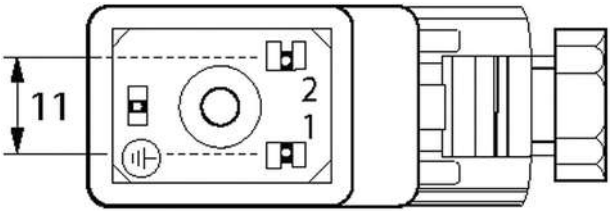

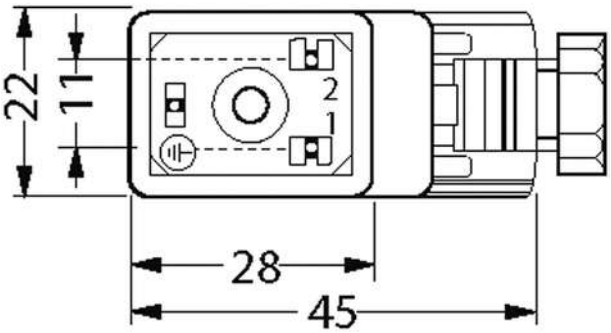

Height: 41 mm

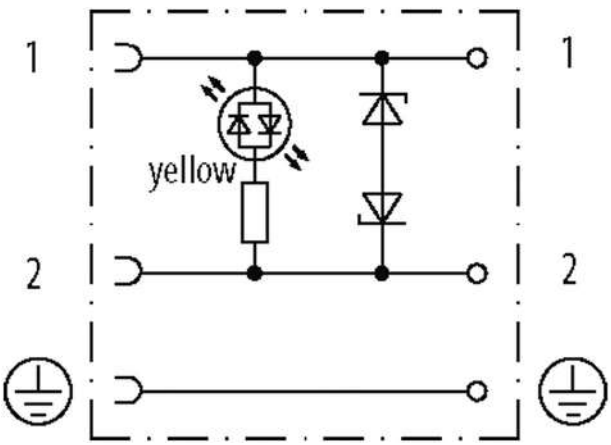

Product may differ from Image

Form

Form	29801

Technical Data

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

Operating voltage	24 V AC ±20% / DC ±25%
Operating current per contact	max. 4 A
Configuration	2 contacts + PE
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
General data	
Temperature range	-20...+60 °C
Commercial data	
country of origin	CZ
customs tariff number	85366990
EAN	4048879187190
eClass	27279221
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20