COMUS Group

COMUS International

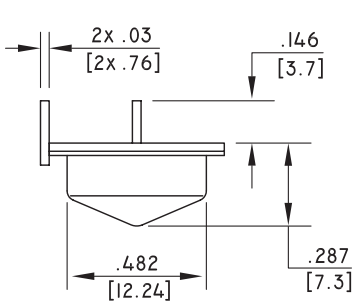
# Part Number : CW1725-1
# Tip Over Switch - Normally Closed
# Product Data Sheet


## PICTURE




✔RoHS Compliant

## DIMENSIONS




Drawings not to scale
All dimensions in inches [mm.] nominal

Vertical working position

## SPECIFICATION

| | | |
|---|---|---|
| Contact Form / Style | | Normally Closed |
| Switching Voltage | Max. | 60 VDC. |
| Switching Current | Max. | 0.25 A. |
| Switching Capacity (Resistive) | Max. | 3 VA. |
| Contact Resistance | Max. | 30 Ohms at 5 VDC. |
| Operating Angle - Break | | 25° ±10 Omnidirectional |
| Remake Angle | Min. | 8° |
| Operating Temperature Range | | -37°C +100°C |
| Case Material | | Tin Plated Steel |
| Construction | | Hermetically Sealed and Inert Gas Filled |

## Applications

- Security
- Level Detection
- Motion Detection

## Options

- Without second electrode.
- With flexible wires.
- In encapsulated plastic enclosure.
- In other external plating materials.
- Electrode pin configurations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

## NOTE

- When cutting, bending or soldering switch electrodes it is important that the glass to metal seal is not damaged. The cutting or bending point should be no closer than 3mm to the glass to metal seal and the electrode should be supported between the cutting or bending point and the glass to metal seal.

| Rev. No. | Revision Note | Date | Signature |
|---|---|---|---|
| 2 | Datasheet Redesign | 05-26-06 | LG |

CERTIFIED BY STR-R ISO 9001:2000 REGISTERED COMPANY

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.


**Phone: (1) 973 777 6900** **www.comus-intl.com** **Fax : (1) 973 777 8405**

Belgium: + 32 (0)12 390400 - France: + 33 (0) 1 43 96 86 10 - Assemtech, UK: +44 (0) 1255 862236



©2006 Copyright Comus International ,454 Alwood Road, Clifton NJ 07012, USA.