
U.53KL - Non-tapped beams



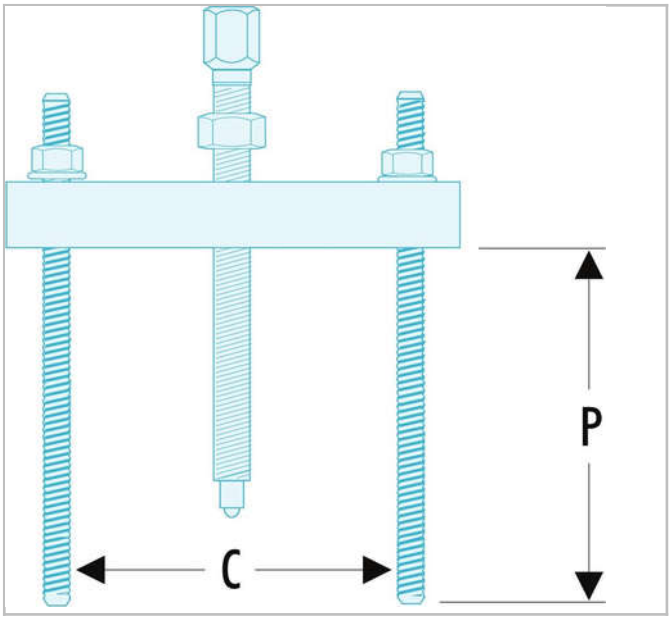

Description:

- Non tapped beams allow to use clamps U.49P1 to U.49P9 to extract bearings by inside grip.
- U.53KL0: for clamps U.49P1 to U.49P4.
- U.53KL2: for clamps U.49P5 to U.49P9 with adaptor tip U.49BR1.

© FACOM 2020

	Depth [mm]	Depth Maxi [mm]	Diameter [mm]	Diameter D1 [mm]	Length L [mm]	Length L1 [mm]	Length L2 [mm]	Length L3 [mm]	C Mini - Maxi [mm]	Hex Size [mm]	Screw Size ["]	Tonnes ["]	t ["]	Weight [Kg]
U.53 KL0	125.0	125.0	M8	6.0	110.0	155.0	20.0	20.0	25 - 100	6.0	U.53 KL0-02	1.0	10.0	0.4
U.53 KL2	240.0	240.0	M16	11.0	220.0	280.0	30.0	30.0	70 - 200	11.0	U.53 K2-07	3.0	30.0	2.4

© FACOM 2020