MURR ELEKTRONIK
stay connected

M8 FEMALE 0° FIELD-WIREABLE SCREW TERM.


4-pol. 0,14…0.5mm²

Female straight
M8, 4-pole
Screw terminals
Connection cross section: 0.14...0.5 mm²

Link to Product

Illustration



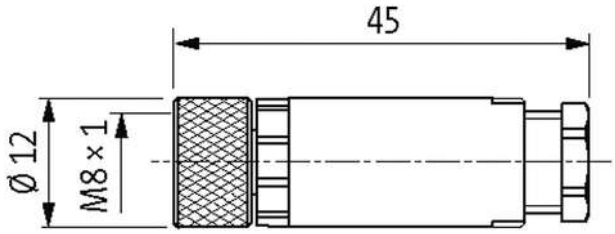

Product may differ from Image

c UL us Listed

Form

Form	08631

Technical Data

Operating voltage	max. 60 V
Operating voltage (only UL listed)	30 V
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	III
Connection cross section	0.14...0.5 mm²
Sealing range (cable Ø)	3.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Over voltage category	III

General data

Pollution Degree	3
Temperature range	-40...+85 °C
Material (housing)	PA
Material (contact)	Gold plated bronze
Dimensions H×W×D	45×12×12 mm

Commercial data


country of origin	DE
customs tariff number	85366990
EAN	4048879224505
eClass	27279221
Packaging unit	1


Sketch

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/22

MURR ELEKTRONIK
stay connected

Female



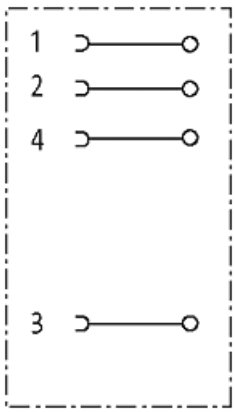

Product may differ from Image

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/22