
Cooker Control Units

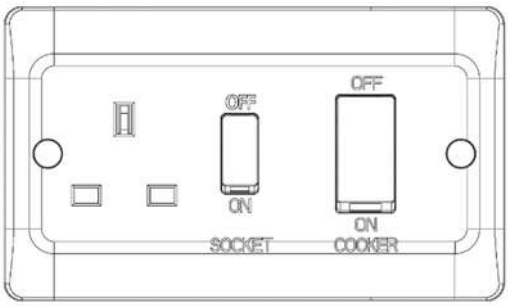

Description

This uniquely shaped range, in the Vimark Pro style, is easy to install with bold terminal markings and is supplied in individual protective polybags suitable for display.

This wide range includes neon versions, and an option of red or white switches.

Features

- Contemporary designed profile
- Concave rockers
- Switches rated at 45A
- Only one size 4mm screwdriver needed
- Terminals have clear bold markings
- Neon versions available
- 2 earth terminals
- Terminals have large lead-ins
- 25-year guarantee

Range

Cooker control unit – red switch	VP1302
Cooker control unit, neon – red switch	VP1302N
45A cooker cable outlet	VP1217

Technical Specification

Voltage rating	250Vac
Current Rating	45A
Contact gap	3mm
Front plate material	Urea formaldehyde

Urea flammability classification UL94 grade V-(

No user serviceable parts

Back Boxes

Minimum recommended depth

	Flush 25mm	Dry lining 35mm	Surface 25mm
2g	DB168	DB2543	VP1229

Standards

- BS 4177-4

Terminal Capacity

	6mm²	10mm²
L & N	2	1

Deta Electrical Company Ltd.
UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT UK
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972 Ireland
Tel. +44 1582 544 548 technical@deta.co.uk