Separate units ø 22: Heads

RS 260-148

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


► PUSH-BUTTONS - NON ILLUMINATED

SPRING RETURN - FLUSH

Cat. No.



L21AA01



Without engraving

● Red	**L21AA01**
● Green	**L21AA02**
● Black	**L21AA03**
● Yellow	**L21AA04**
○ White	**L21AA05**
● Blue	**L21AA06**

With engraving

Red	**L21AA81**
Green	**L21AA82**
Black	L21AA83

On demand engraving (p. 79)
Symbol code to be added at the end of the catalogue number

● Red	L21AA31⌊⌊⌊⌋
● Green	L21AA32⌊⌊⌊⌋
● Black	L21AA33⌊⌊⌊⌋
● Yellow	L21AA34⌊⌊⌊⌋
○ White	L21AA35⌊⌊⌊⌋
● Blue	L21AA36⌊⌊⌊⌋

(Other colours and engraving: fill in the form p. 79)

Without button plate **L21AA00**

Button plates (see p. 74)




L21AA00

SPRING RETURN - FLUSH

Reinforced degree of protection: IP 67



L22AF01



Supplied with shroud

Opaque

● Red	**L22AF01**
● Green	**L22AF02**
● Black	**L22AF03**

Transparent

● Yellow	L22AG04
○ White	L22AG05
● Blue	L22AG06

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


► PUSH-BUTTONS - NON ILLUMINATED (CONTINUED)

SPRING RETURN - SUPER FLUSH

Cat. No.



L23AA02



Metallic chrome bezel
Cut-out ø 30

Without engraving

● Red	**L23AA01**
● Green	**L23AA02**
● Black	**L23AA03**
● Yellow	L23AA04
○ White	L23AA05
● Blue	L23AA06

With engraving

Red	**L23AA81**
Green	**L23AA82**

On demand engraving (p. 70)
Symbol code to be added at the end of the catalogue number


● Red	L23AA31⌊⌋⌋⌋
● Green	L23AA32⌊⌋⌋⌋
● Black	L23AA33⌊⌋⌋⌋
● Yellow	L23AA34⌊⌋⌋⌋
○ White	L23AA35⌊⌋⌋⌋
● Blue	L23AA36⌊⌋⌋⌋

(Other colours and engraving: fill in the form p. 79)

SPRING RETURN - PROJECTING



L21AB01




● Red	**L21AB01**
● Green	**L21AB02**
● Black	**L21AB03**
● Yellow	**L21AB04**
○ White	**L21AB05**
● Blue	**L21AB06**

SPRING RETURN - MUSHROOM HEAD Ø 32

Push



L21AC03



● Red	**L21AC01**
● Green	**L21AC02**
● Black	**L21AC03**
● Yellow	L21AC04

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► PUSH-BUTTONS - NON ILLUMINATED (CONTINUED)

SPRING RETURN - MUSHROOM HEAD Ø 40 — Push



L21AD01




	Cat. No.
● Red	**L21AD01**
● Green	**L21AD02**
● Black	**L21AD03**
● Yellow	**L21AD04**

SPRING RETURN - MUSHROOM HEAD Ø 70 — Push



L21AE03




● Red	**L21AE01**
● Black	**L21AE03**

SPRING RETURN - FLUSH-PROJECTING — Double touch



L61QB21




I Green O Red	**L61QB21**
Green engraving START Red engraving STOP	L61QB21B

SPRING RETURN - FLUSH-PROJECTING — Double touch - reinforced degree of protection: IP 67



L62QM21



Supplied with transparent shroud

I Green O Red	**L62QM21**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


▶ PUSH-BUTTONS - NON ILLUMINATED (CONTINUED)

SPRING RETURN - FLUSH-FLUSH

Double touch



L61QA21




	Cat. No.
Green Red	**L61QA21**
Green engraving ◁II▷ Green engraving ▷I◁	L61QA22
Green Green	L61QA22K
Black Black	L61QA33C

SPRING RETURN - FLUSH-PROJECTING-FLUSH

Triple touch



L61BA22




	Cat. No.
Green Red engraving STOP Green	**L61BA22**
Green Red engraving STOP Green	L61BA22B

STAY-PUT - FLUSH



L21CA01



	Cat. No.
Red	**L21CA01**
Green	**L21CA02**
Black	**L21CA03**
Yellow	**L21CA04**
White	**L21CA05**
Blue	**L21CA06**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic black bezel
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


► PUSH-BUTTONS - NON ILLUMINATED (CONTINUED)

STAY-PUT - PROJECTING

Cat. No.



L21CB02



Plastic chrome bezel
Black bezel on request (form p. 79)

● Red	**L21CB01**
● Green	**L21CB02**
● Black	**L21CB03**
● Yellow	L21CB04
○ White	L21CB05
● Blue	L21CB06


► MUSHROOM HEADS - NON ILLUMINATED

Ø 32 - STAY-PUT

Push-turn to reset



L22EC01




● Red	**L22EC01**
● Green	L22EC02
● Black	**L22EC03**
● Yellow	L22EC04

Ø 32 - STAY-PUT

Push-pull to reset



L22DC01




● Red	L22DC01

Ø 40 - STAY-PUT

Push-turn to reset



L22ED01



Without engraving

● Red	**L22ED01**
● Green	L22ED02
● Black	**L22ED03**
● Yellow	L22ED04

With engraving

● Red - engraving STOP - STOP - STOP	**L22ED01B**


Catalogue No. in bold: normally in stock at distribution outlets



Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic black bezel
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)


► MUSHROOM HEAD - NON ILLUMINATED (CONTINUED)

Ø 40 - STAY-PUT	Push-pull to reset	Cat. No.
 L22DD01		● Red ● Black	**L22DD01** **L22DD03**

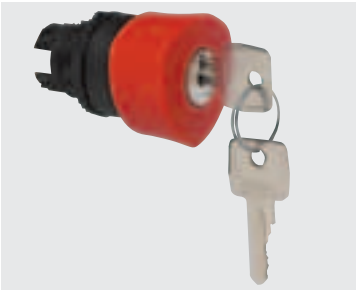Ø 40 - STAY-PUT	Key to reset	Cat. No.
 L22GM01		Supplied with 2 keys profile n° 455 ● Red	**L22GM01**

► EN 418 EMERGENCY STOP - NON ILLUMINATED

Ø 32 EN 418 - STAY-PUT	Push-pull	Cat. No.
 L22DQ01		Head position visible from the side with yellow collar Compliant with the requirements of emergency stop: IEC 60947-5-5 /EN 418 ● Red	**L22DQ01**

Ø 32 EN 418 - STAY-PUT	Key to reset	Cat. No.
 L22GQ01		Supplied with 2 keys profile n° 455 Head position visible from the side with yellow collar Compliant with the requirements of emergency stop: IEC 60947-5-5 /EN 418 ● Red	L22GQ01

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic black bezel
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► EN 418 EMERGENCY STOP - NON ILLUMINATED (CONTINUED)

Ø 40 EN 418 - STAY-PUT — Push-pull to reset



L22DR01




Head position visible from the side with yellow collar
Compliant with the requirements of emergency stop:
IEC 60947-5-5 /EN 418

	Cat. No.
● Red	**L22DR01**

Ø 40 EN 418 - STAY-PUT — Push-turn to reset



L22ER01




Head position visible from the side with yellow collar
Compliant with the requirements of emergency stop:
IEC 60947-5-5 /EN 418

● Red	**L22ER01**

Ø 40 EN 418 - STAY-PUT — Key to reset



L22GR01




Supplied with 2 keys profile n° 455
Head position visible from the side with yellow collar
Compliant with the requirements of emergency stop:
IEC 60947-5-5 /EN 418

● Red	**L22GR01**

Ø 54 EN 418 - STAY-PUT — Push-pull to reset with flag indicator



L22DU01



Double position indicator: head and collar
Compliant with the requirements of emergency stop:
IEC 60947-5-5 /EN 418

● Red - engraving O- I	**L22DU01A**
● Red - engraving STOP - I	**L22DU01**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
Equipped with a locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► SELECTOR SWITCHES - NON ILLUMINATED

WITH HANDLE



L21KA03



2 positions	Cat. No.
Stay-put positions - 45° 	
● Red	**L21KA01**
● Green	**L21KA02**
● Black	**L21KA03**
● Grey	**L21KA08**
Spring return - 45° 	
● Red	L21KB01
● Green	L21KB02
● Black	**L21KB03**
● Grey	L21KB08
Stay-put positions - 45° 	
● Red	**L21KC01**
● Green	**L21KC02**
● Black	**L21KC03**
● Grey	**L21KC08**
Spring return - 45° 	
● Red	L21KD01
● Green	L21KD02
● Black	**L21KD03**
● Grey	L21KD08
Stay-put positions - 90° 	
● Red	L21KE01
● Green	L21KE02
● Black	**L21KE03**
● Grey	L21KE08
Stay-put positions - 90° 	
● Red	L21KF01
● Green	L21KF02
● Black	**L21KF03**
● Grey	L21KF08

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)

WITH HANDLE



L21MA03





L21MA08

3 positions		Cat. No.
Stay-put positions - 45°		
● Red		**L21MA01**
● Green		**L21MA02**
● Black		**L21MA03**
● Grey		**L21MA08**
Spring return from left to 0 - 45°		
● Red		L21MB01
● Green		L21MB02
● Black		**L21MB03**
● Grey		L21MB08
Spring return from right to 0 - 45°		
● Red		L21MC01
● Green		L21MC02
● Black		**L21MC03**
● Grey		L21MC08
Spring return to 0 - 45°		
● Red		L21MD01
● Green		L21MD02
● Black		**L21MD03**
● Grey		L21MD08
Stay-put positions - 90°		
● Red		L21MK01
● Green		L21MK02
● Black		**L21MK03**
● Grey		L21MK08

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)

WITH LONG HANDLE



L21KP03



2 positions		Cat. No.
Stay-put positions - 45°		
● Red	0 1	L21KP01
● Green		L21KP02
● Black		**L21KP03**
● Grey		L21KP08
Spring return - 45°		
● Red	0 1	L21KQ01
● Green		L21KQ02
● Black		**L21KQ03**
Stay-put positions - 45°		
● Red	0 1	L21KR01
● Green		L21KR02
● Black		**L21KR03**
Spring return - 45°		
● Red	0 1	L21KS01
● Green		L21KS02
● Black		**L21KS03**
Stay-put positions - 90°		
● Red	0 1	L21KT01
● Green		L21KT02
● Black		**L21KT03**
Stay-put positions - 90°		
● Red	0 1	L21KU01
● Green		L21KU02
● Black		**L21KU03**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)

WITH LONG HANDLE



L21MR03



3 positions		Cat. No.
Stay-put positions - 45°		
● Red		L21MR01
● Green		L21MR02
● Black		**L21MR03**
● Grey		L21MR08
Spring return from left to 0 - 45°		
● Red		L21MS01
● Green		L21MS02
● Black		**L21MS03**
● Grey		L21MS08
Spring return from right to 0 - 45°		
● Red		L21MT01
● Green		L21MT02
● Black		**L21MT03**
● Grey		L21MT08
Spring return to 0 - 45°		
● Red		L21MU01
● Green		L21MU02
● Black		**L21MU03**
● Grey		L21MU08

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)


WITH KNOB

2 positions

Cat. No.



L21TF03



Stay-put positions - 45°
● Black  **L21TA03**

Spring return - 45°
● Black  **L21TB03**


Stay-put positions - 90°
● Black  **L21TF03**

WITH KNOB


3 positions



L21UA03



Stay-put positions - 45°
● Black  **L21UA03**

Spring return from left to 0 - 45°
● Black  L21UB03

Spring return from right to 0 - 45°
● Black  L21UC03

Spring return to 0 - 45°
● Black  **L21UD03**

Stay-put positions - 90°
● Black  **L21UK03**

Separate units ø 22: Heads


IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)



L21LG00

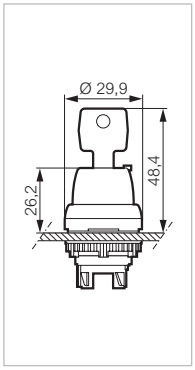

WITH KEY	2 positions	Key free in position:	Cat. No.
	Supplied with 2 keys profile n° 455		
Stay-put positions - 45° ● Black		0	**L21LA00**
Spring return - 45° ● Black		0	L21LB00
Stay-put positions - 45° ● Black		0	**L21LC00**
Spring return - 45° ● Black		0	**L21LD00**
Stay-put positions - 90° ● Black		0	**L21LF00**
Stay-put positions - 90° ● Black		0 - 1	**L21LG00**
Stay-put positions - 90° ● Black		0 - 1	**L21LH00**
Stay-put positions - 90° ● Black		1	**L21LK00**

Key profile n° 1424 and others (form p. 79)

Separate units ø 22: Heads

IP 66
To be combined with a clip and electrical blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - NON ILLUMINATED (CONTINUED)

WITH KEY



L21NA00

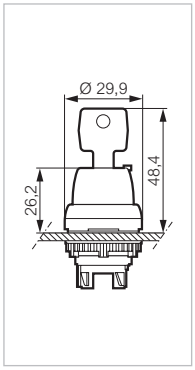

3 positions	**Key free in position:**	Cat. No.
Supplied with 2 keys profile n° 455		
Stay-put positions - 45°		
● Black 	0	**L21NA00**
Spring return from left to 0 - 45°		
● Black 	0	L21NB00
Spring return from right to 0 - 45°		
● Black 	0	L21NC00
Spring return to 0 - 45°		
● Black 	0	**L21ND00**
Stay-put positions - 45°		
● Black 	1 - 2	L21NE00
Spring return from right to 0 - 45°		
● Black 	1	**L21NJ00**
Stay-put positions - 90°		
● Black 	1 - 0 - 2	**L21NK00**
Stay-put positions - 90°		
● Black 	0	**L21NL00**

Key profile n° 1424 and others (form p. 79)

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 65
With locking ring
Plastic chrome bezel
Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


ADJUSTABLE MECHANICAL PUSH/RESET BUTTON - NON ILLUMINATED

SPRING RETURN - FLUSH

Cat. No.



L21HA01



To be used without electrical block
Stroke 11 mm
Adjustable: 26 mm min to 46 mm max / front side of panel

Without engraving

● Red	**L21HA01**
● Green	**L21HA02**
● Black	**L21HA03**
● Yellow	L21HA04
○ White	L21HA05
● Blue	**L21HA06**


On demand engraving (p. 79)
Symbol code to be added at the end of the catalogue number

● Red	L21HA31⌊⌊⌊⌋
● Green	L21HA32⌊⌊⌊⌋
● Black	L21HA33⌊⌊⌊⌋
● Yellow	L21HA34⌊⌊⌊⌋
○ White	L21HA35⌊⌊⌊⌋
● Blue	L21HA36⌊⌊⌊⌋

SPRING RETURN - PROJECTING



L21HB06



To be used without electrical block
Stroke 11 mm
Adjustable: 26 mm min to 46 mm max / front side of panel

● Red	L21HB01
● Green	L21HB02
● Black	L21HB03
● Yellow	L21HB04
○ White	L21HB05
● Blue	L21HB06

Separate units ø 22: Heads

IP 65
With locking ring
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

▶ BUTTON FOR POTENTIOMETER - NON ILLUMINATED

Cat. No.



L21RP03



Head + mounting base for potentiometer
Plastic chrome bezel

Shaft ø 6 or 6.35 mm
Potentiometer length 46 to 51 mm — **L21RP03**

▶ JOYSTICKS - NON ILLUMINATED


Cat. No.



LM2F



LMV4F

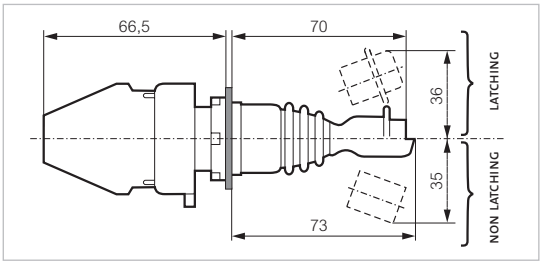

Heads supplied with a 3 position clip
Specific electrical blocks (p. 63)

Head does not lock in position 0

2 directions - 3 positions

2 maintained (stay-put) — A - 0 - B — **LM2F**
2 spring-return — A→0←B — **LM2A**

4 directions - 5 positions

4 maintained (stay-put) — A / C - 0 - D / B — **LM4F**

4 spring-return — A / C→0←D / B — **LM4A**

Head locks in position 0

2 directions - 3 positions

2 maintained (stay-put) — A - 0 - B — **LMV2F**
2 spring-return — A→0←B — **LMV2A**

4 directions - 5 positions

4 maintained (stay-put) — A / C - 0 - D / B — **LMV4F**

4 spring-return — A / C→0←D / B — **LMV4A**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel- Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


► PUSH-BUTTONS - ILLUMINATED

SPRING RETURN - FLUSH

Cat. No.



L21AH20



Without engraving

● Red	**L21AH10**
● Green	**L21AH20**
● Yellow	**L21AH40**
○ White	**L21AH50**
● Blue	**L21AH60**

On demand engraving (p. 79)
Symbol code to be added at the end of the catalogue number

● Red	L21AH31⌊⌊⌊⌋
● Green	L21AH32⌊⌊⌊⌋
● Yellow	L21AH34⌊⌊⌊⌋
○ White	L21AH35⌊⌊⌊⌋
● Blue	L21AH36⌊⌊⌊⌋



L21AH00

Without button plate — **L21AH00**


Button plates (p. 74)

SPRING RETURN - FLUSH

Reinforced degree of protection: IP 67



L22AP40




Supplied with transparent shroud

● Red	L22AP10
● Green	L22AP20
● Yellow	L22AP40
○ White	L22AP50
● Blue	L22AP60

SPRING RETURN - SUPER FLUSH



L23ACH10



Metallic chrome bezel
Drilling ø 30 mm

Without engraving

● Red	**L23AH10**
● Green	**L23AH20**
● Yellow	L23AH40
○ White	L23AH50
● Blue	L23AH60

On demand engraving (p. 79)
Symbol code to be added at the end of the catalogue number

● Red	L23AH31⌊⌊⌊⌋
● Green	L23AH32⌊⌊⌊⌋
● Yellow	L23AH34⌊⌊⌊⌋
○ White	L23AH35⌊⌊⌊⌋
● Blue	L23AH36⌊⌊⌊⌋

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel
Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


► PUSH-BUTTONS - ILLUMINATED (CONTINUED)

SPRING RETURN - PROJECTING

Cat. No.



L21AK20




● Red	**L21AK10**
● Green	**L21AK20**
● Yellow	**L21AK40**
○ White	**L21AK50**
● Blue	**L21AK60**

SPRING RETURN - MUSHROOM HEAD Ø 32

Push



L21AL10




● Red	**L21AL10**
● Green	**L21AL20**
● Yellow	L21AL40
○ White	L21AL50

SPRING RETURN - FLUSH-FLUSH

Double touch



L62QH21



Central part illuminated

● Green ● Red	**L62QH21**
● Green ● Green	**L62QH22V**
● Green engraving START ● Red engraving STOP	L62QH21A

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► PUSH-BUTTONS - ILLUMINATED (CONTINUED)

SPRING RETURN - FLUSH-PROJECTING — **Double touch** — Cat. No.



L61QK21




Central part illuminated

Green Red	**L61QK21**
White Black	**L61QK53**
Green engraving START Red engraving STOP	**L61QK21A**

SPRING RETURN - FLUSH-PROJECTING — **Double touch - reinforced degree of protection: IP 67**



L62QN21



Supplied with transparent shroud
Central part illuminated

Green Red	**L62QN21**

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► PUSH-BUTTONS - ILLUMINATED (CONTINUED)

STAY-PUT - FLUSH



L21CH20




	Réf.
● Red	**L21CH10**
● Green	**L21CH20**
● Yellow	**L21CH40**
○ White	**L21CH50**
● Blue	**L21CH60**

STAY-PUT - SUPER FLUSH



L23CH10




Metallic chrome bezel
Drilling ø 30 mm

● Red	**L23CH10**
● Green	**L23CH20**
● Yellow	L23CH40
○ White	L23CH50
● Blue	L23CH60

STAY-PUT - PROJECTING



L21CK20



● Red	**L21CK10**
● Green	**L21CK20**
● Yellow	**L21CK40**
○ White	**L21CK50**
● Blue	**L21CK60**

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Black bezel
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

► MUSHROOM HEADS - ILLUMINATED

Ø 32 - STAY-PUT — Push-turn to reset



L22EL10




	Cat. No.
● Red	**L22EL10**

Ø 32 - STAY-PUT — Push-pull to reset



L22DL10




● Red	L22DL10

Ø 40 - STAY-PUT — Push-turn to reset



L22EM10




● Red	**L22EM10**
● Green	L22EM20
● Yellow	L22EM40

Ø 40 - STAY-PUT — Push-pull to reset



L22DM10



● Red	**L22DM10**
● Green	L22DM20
● Yellow	L22DM40
○ White	L22DM50

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

EN 418 EMERGENCY STOP - ILLUMINATED

Ø 40 EN 418- STAY-PUT | **Push-pull to reset** | Cat. No.



L22DN10



Black bezel
Head position visible from the side with yellow collar
Compliant with the requirements of emergency stop:
IEC 60947-5-5 /EN 418


● Red **L22DN10**

SELECTOR SWITCHES - ILLUMINATED

WITH HANDLE | **2 positions** | Cat. No.



L21KJ30



Stay-put positions - 45°



● Red **L21KG10**
● Green **L21KG20**
● Black **L21KG30**

Spring return- 45°



● Red L21KH10
● Green L21KH20
● Black **L21KH30**

Stay-put positions - 45°



● Red **L21KJ10**
● Green **L21KJ20**
● Black **L21KJ30**

Spring return- 45°



● Red L21KK10
● Green L21KK20
● Black **L21KK30**

Stay-put positions - 90°



● Red L21KL10
● Green L21KL20
● Black **L21KL30**

Stay-put positions - 90°



● Red **L21KM10**
● Green **L21KM20**
● Black **L21KM30**

Catalogue No. in bold: normally in stock at distribution outlets

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1


Characteristics (p. 94)
Cross reference list (p. 311)

SELECTOR SWITCHES - ILLUMINATED

WITH HANDLE



L21ME10



3 positions		Cat. No.
Stay-put positions - 45°		
● Red		**L21ME10**
● Green		**L21ME20**
● Black		**L21ME30**
Spring return from left to 0 - 45°		
● Red		L21MF10
● Green		L21MF20
● Black		L21MF30
Spring return from right to 0 - 45°		
● Red		**L21MG10**
● Green		**L21MG20**
● Black		**L21MG30**
Spring return to 0 - 45°		
● Red		**L21MH10**
● Green		**L21MH20**
● Black		**L21MH30**
Stay-put positions - 90°		
● Red		L21MJ10
● Green		L21MJ20
● Black		L21MJ30

Separate units ø 22: Heads

IP 66
To be combined with a clip, LED block and contact blocks (p. 48)
With locking ring
Plastic chrome bezel - Black bezel on request (form p. 79)
Conform to IEC 60947-5-1

Characteristics (p. 94)
Cross reference list (p. 311)


SELECTOR SWITCHES - ILLUMINATED (CONTINUED)

WITH LONG HANDLE

2 positions



L21KV30




		Cat. No
Stay-put positions - 45°		
● Black		**L21KV30**
Stay-put positions - 45°		
● Black		L21KX30
Spring return - 45°		
● Black		L21KY30

WITH LONG HANDLE

3 positions



L21ML30



		Cat. No
Stay-put positions - 45°		
● Black		**L21ML30**
Spring return from left to 0 - 45°		
● Black		L21MM30
Spring return from right to 0 - 45°		
● Black		L21MN30
Spring return to 0 - 45°		
● Black		L21MP30