
# E12789

## H splitter

ZDO3E050MSS0000-00STGE050MSS

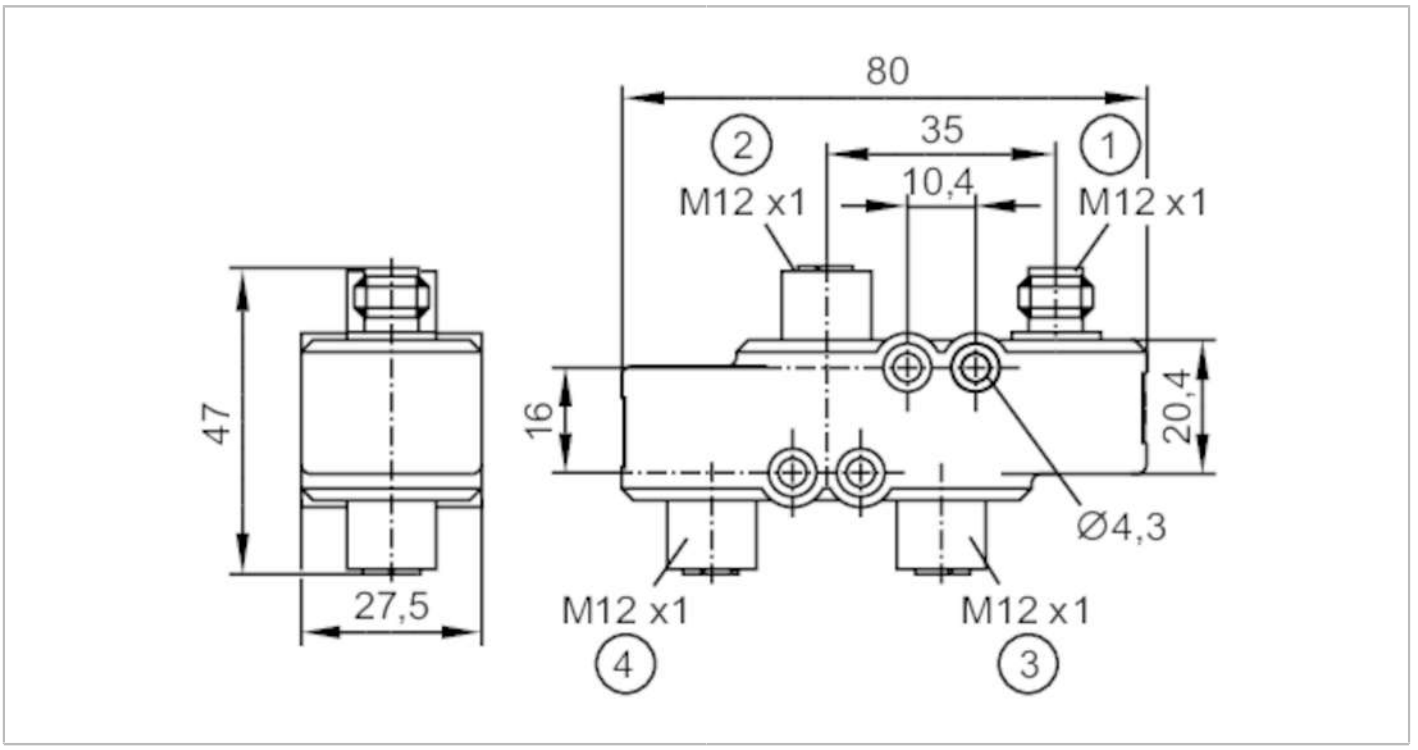


| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Gold-plated contacts |
| **Electrical data** | | |
| Operating voltage | [V] | < 63 DC |
| Protection class | | III |
| Max. current load total | [A] | 16;  (40 °C) |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -40...85 |
| Protection | | IP 65 |
| **Mechanical data** | | |
| Weight | [g] | 130.7 |
| Moulded-body material | | PBT |
| Material nut | | brass, nickel-plated |
| Sealing material | | HNBR |
| **Accessories** | | |
| Items supplied | | labels: 2 |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

# E12789

## H splitter


ZDO3E050MSS0000-00STGE050MSS

## Electrical connection - plug

Connector: 1 x M12; coding: L; Moulded body: PBT, black; Locking: brass, nickel-plated; Contacts: gold-plated




### Connection

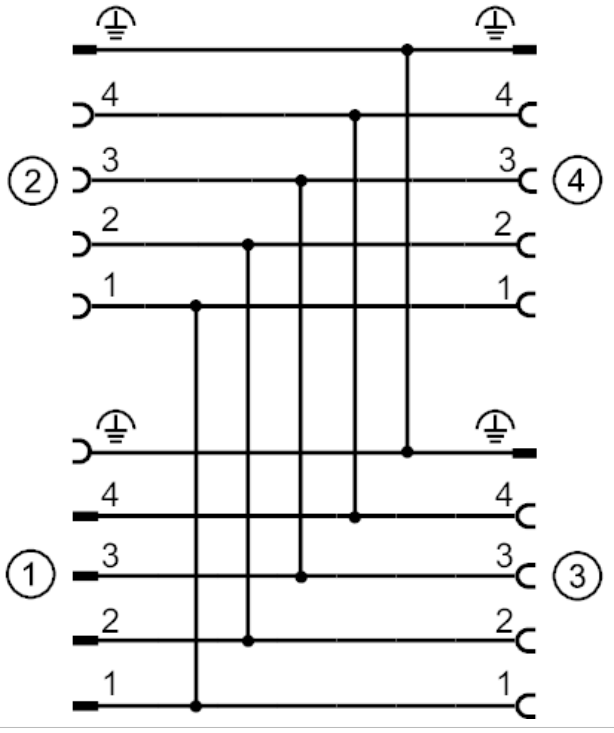


## Electrical connection - socket

Connector: 3 x M12; coding: L; Moulded body: PBT, black; Locking: brass, nickel-plated; Sealing: HNBR; Contacts: gold-plated

