multimec®

Low cap, excellent for foil overlay

5G + 1JS




- Round cap
- Ø9.6 mm
- h =10.4 mm
- Material: ABS/polycarbonate
- Temp. Range:
  - Solid cap: -40/+65°C
  - Transparent cap: -40/+85°C
- Panel cut-out: 1JS-Ø10.4

**Legends on the picture are custom*


All dimensions in mm

DIMENSIONS

TH

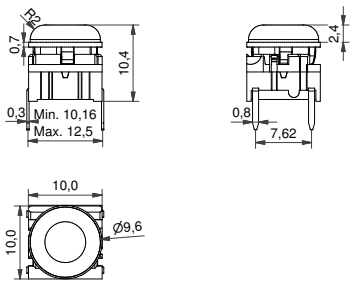

SMD w/LED

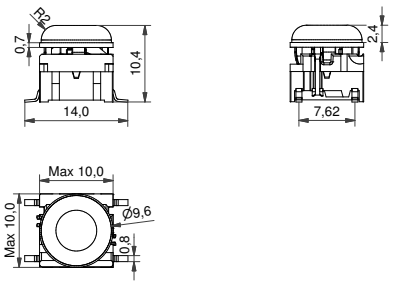

ILLUMINATED – HOW TO ORDER

Switch	Mounting	Actuation force	LED		Cap transparent	Colour code
5 G				+	1 J S	
	TH9 through-hole	**20**	**01** blue			**11** transparent
	SH9 surface mount	**35**	**22** green			**16** frosted white
		65	**42** yellow			
		***Q**	**61** white			
			82 red			
			2242 green/yellow			
			8222 red/green			
			8242 red/yellow			

NON-ILLUMINATED– HOW TO ORDER

Switch	Mounting	Actuation force		Cap solid colour	Colour code
5 G			+	1 J S	
	TH9 through-hole	**20**			**00** blue
	SH9 surface mount	**20Q**			**02** green
		35			**03** grey
		65			**04** yellow
					06 white
					08 red
					09 black

Ordering example:
5GTH935+1JS08 without illumination OR 5GTH93501+1JS16 with illumination OR *5GTH92001Q (illuminated quiet version)

Please see colour codes, updates of products and changes of specifications on www.mec.dk