M12 MALE BUS TERMINATING PLUG FOR DEVICENET

DeviceNet, CANopen
Terminating resistor
Male
M12 – M12, 5-pole (circuit diagram)
A-coded

Link to Product

Illustration

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/20

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

stay connected



Male



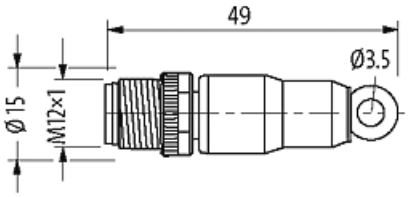

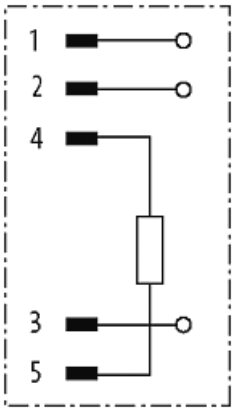

Product may differ from Image

Approvals

c UL us Listed

More Info

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/20

MURR ELEKTRONIK
stay connected

Form	
Form	13461
Technical Data	
Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85332100
EAN	4048879198769
eClass	19070403
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/20