HIRSCHMANN® Test & Measurement
A BRAND OF SKS

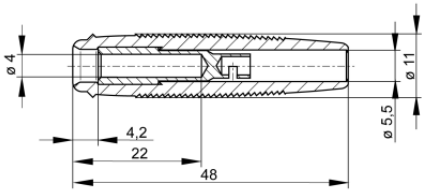
SKS Kontakttechnik GmbH

Sockets

KUN 30



CE

Product	KUN 30
description	Shatter-proof, flexible, insulated coupling for a 4 mm diameter plug and solder connection up to a cable cross-section of 2.5 mm². Nickel-plated brass socket.
operating instruction	BA405
article-no. / *colour	9318041xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white Ni
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	16 A
material socket	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010(1)	-25 °C to +70 °C

(1) contact the manufacturer for applications at deviating temperature ranges
(2) without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022

4 mm system