
Panel-mount socket SLB4-F...

Insulated, rigid, Ø 4 mm, accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve. Machined brass. The socket is screwed into pre-drilled panels of plastic, metal, etc. **Connection: Flat connecting tab.**


SLB4-F...



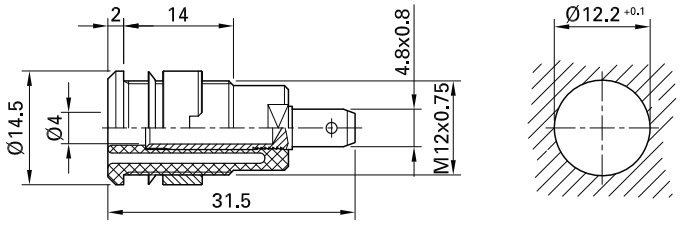

SLB4-F6,3...



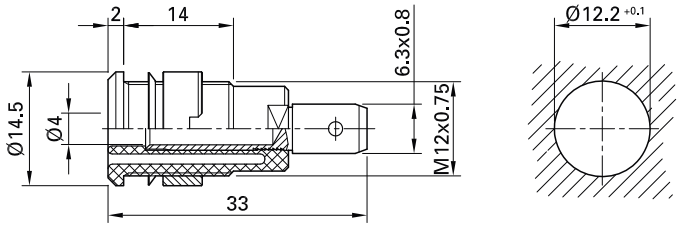

Order No.	Type	Rated voltage/current	Connection		*Standard colors
23.3000-*	SLB4-F	1000 V, CAT III / 24 A	Flat connecting tab 4.8 mm × 0.8 mm	Au c UL us	20 21 22 23 24 25 26 27 28 29
49.7044-*	SLB4-F/N-X	1000 V, CAT III / 24 A	Flat connecting tab 4.8 mm × 0.8 mm	Ni c UL us	20 21 22 23 24 25 26 27 28 29
23.3060-*	SLB4-F6,3	1000 V, CAT III / 32 A	Flat connecting tab 6.3 mm × 0.8 mm	Au c UL us	20 21 22 23 24 25 26 27 28 29
49.7046-*	SLB4-F6,3/N-X	1000 V, CAT III / 32 A	Flat connecting tab 6.3 mm × 0.8 mm	Ni c UL us	20 21 22 23 24 25 26 27 28 29

Supplied assembly material

Page 167	MUR/M12x0,75	Round nut, suitable for	SLB4-F, SLB4-F/N-X, SLB4-F6,3, SLB4-F6,3/N-X
Page 167	SSP4	Washer, suitable for	SLB4-F, SLB4-F6,3

MA

Assembly instructions MA152

www.staubli.com/electrical

Flat connecting receptacles FSH..., page 170

Tube spanners SS2, SS425, page 170