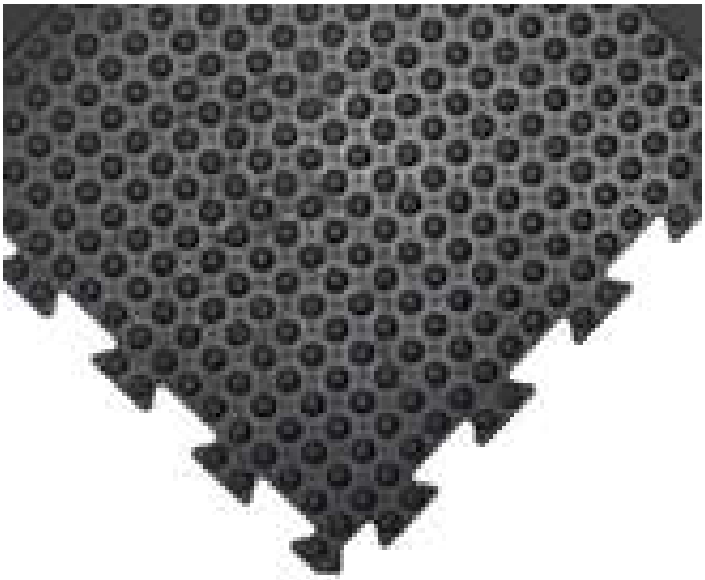

# Bubblemat Connect

## Interlocking tiles with high anti-fatigue properties

- Durable anti-fatigue matting system.
- Raised bubbled surface to stimulate blood circulation and reduction of fatigue.
- Interlocking system provides flexibility in the type of shape that can be created.
- Soft but sturdy rubber material offers protection from adverse effects from cold, hard concrete floors.
- Rubber is naturally slip resistant.












## Parts

| Part Number | Size | Colour | Weight (kg) |
|---|---|---|---|
| BF010709 | 50 cm x 50 cm | Black/Yellow | 2.15 |

## Technical Specifications

| | |
|---|---|
| **Material** | Natural rubber |
| **Recycled Material** | 43% recycled content |

| Part Number | Size | Colour | Weight (kg) |
|---|---|---|---|
| BF010708 | 50 cm x 50 cm | Black/Yellow | 2.15 |
| BF010009 | 50 cm x 50 cm | Black | 2.15 |
| BF010008 | 50 cm x 50 cm | Black | 2.15 |
| BF010007 | 50 cm x 50 cm | Black | 2.15 |

| | |
|---|---|
| **Content %** | |
| **Surface Finish** | Bubble |
| **Product Height** | 13.5 mm |
| **Product Weight** | 5,75 kg |
| **Min. Operating Temperature** | -30°C |
| **Max. Operating Temperature** | +50°C |
| **Resistance to Chemicals** | Not resistant to fat and mineral oil |
| **Environmental Resistance** | Suitable for dry indoor environments |
| **UV Resistance** | Yes |
| **Installation Method** | Loose lay interlocking mats |
| **Cleaning Method** | Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats. |
| **Tensile Strength** | 3 MPa |
| **Elongation** | 250% |
| **Manufacturing process** | Compression moulding |