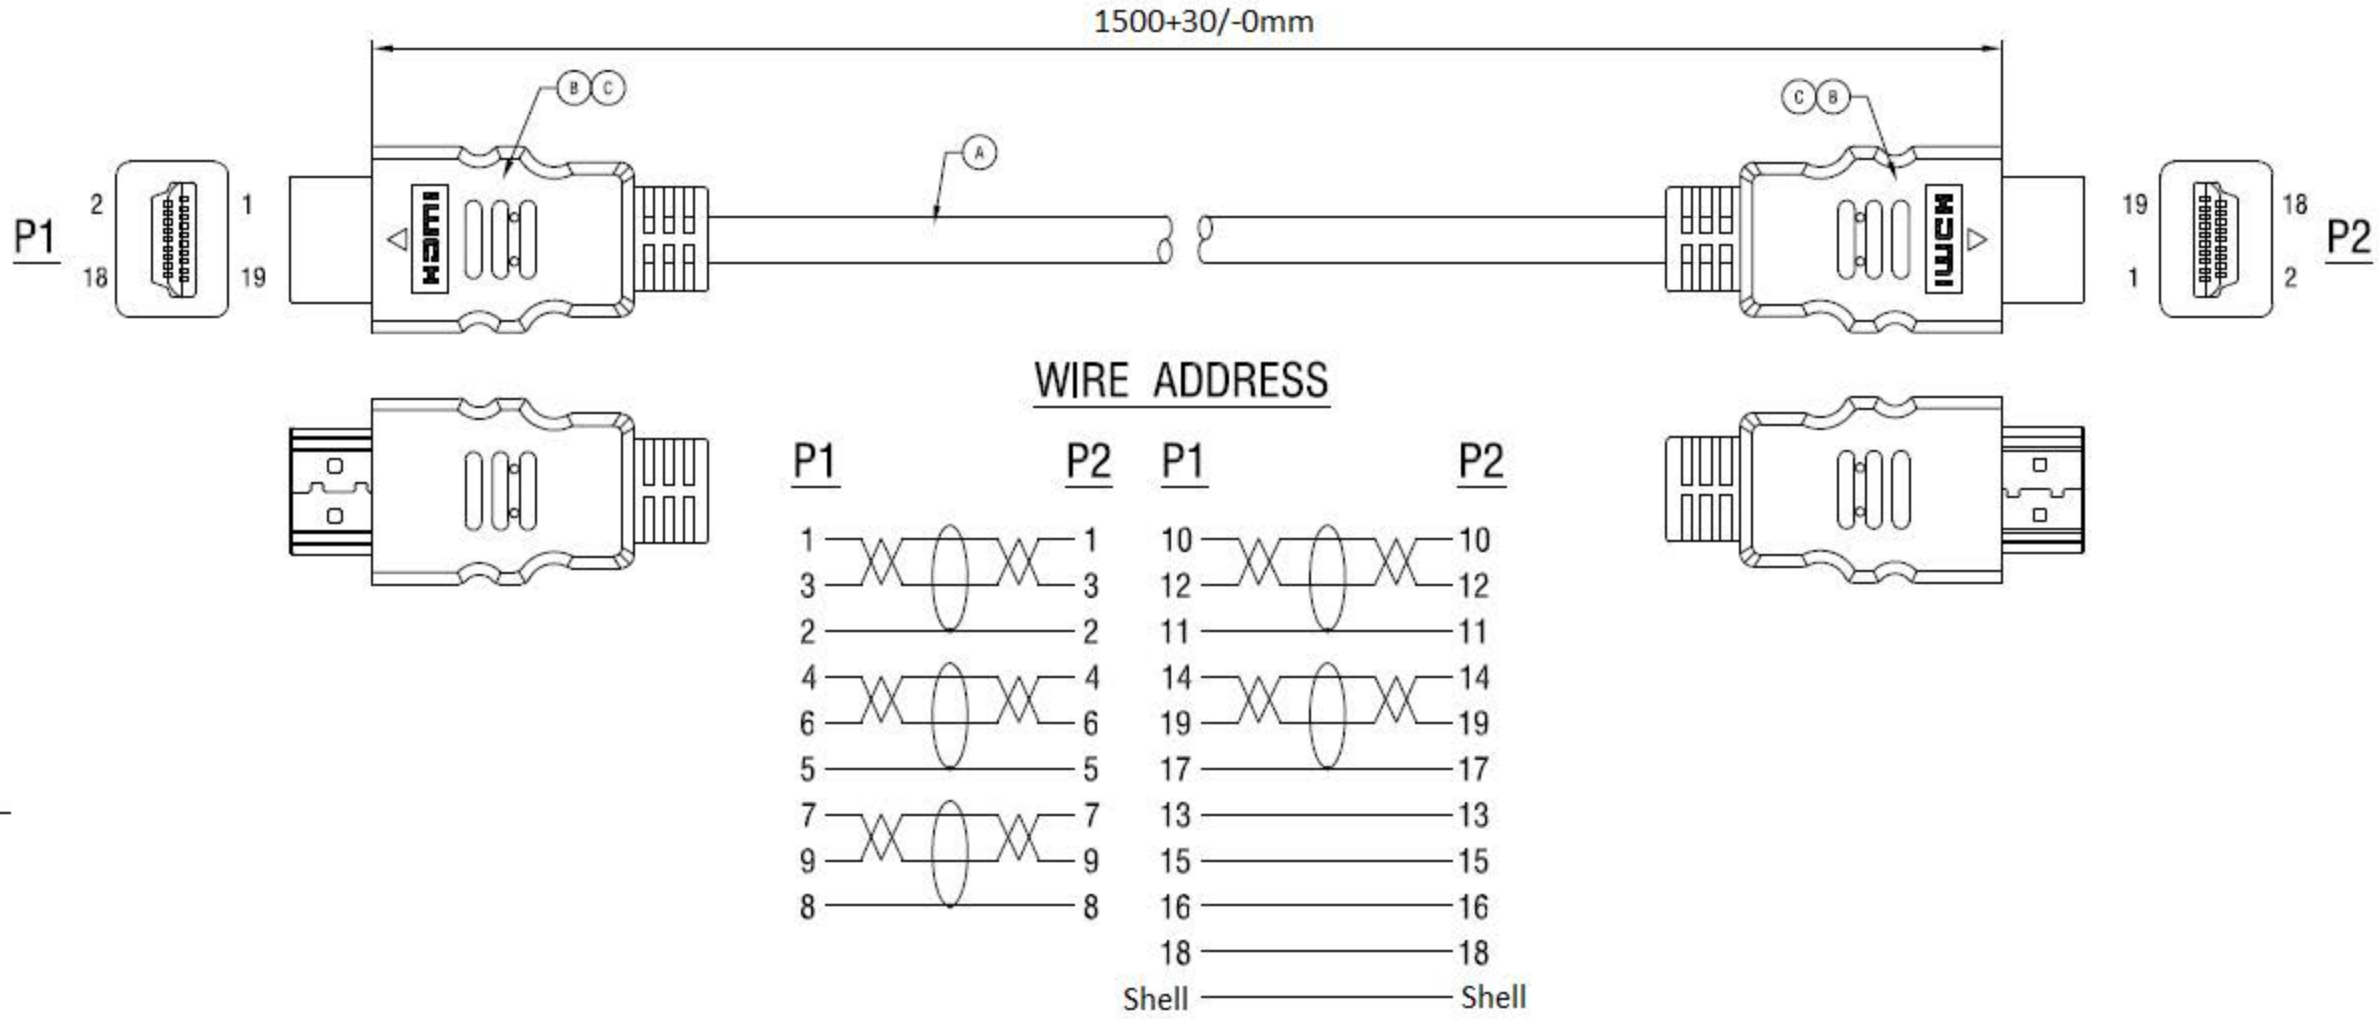

WIRE ADDRESS

P1	P2	P1	P2
1	1	10	10
3	3	12	12
2	2	11	11
4	4	14	14
6	6	19	19
5	5	17	17
7	7	13	13
9	9	15	15
8	8	16	16
		18	18
		Shell	Shell

Electrical Test:
1. 100% Test Open, Short, Mis-wire
2. Contact Resistance: 5Ω Max.
3. Insulation Resistance: 5MΩ Min.
4. Hi-Pot: 300V DC/10Ms.
5. Real Test Passed 4K @120Hz or 8K @60Hz or 10K @30Hz
6. Real Test Not Twinking, Double Vision and Decolor

Cable Printing: High speed HDMI™ Cable with Ethernet

C		45P Black PVC		G
B		HDMI 19P Mlae (Black Insulator, Gold Plated)	2	pcs
A		UL20276 (30WAG*1P+DAM)*5 +30AWG*4C+ADB, OD:6.0mm Black PVC Jacket	1	pcs
Number	Z-11.04.5941	Specifications	Q'ty	Unit

VER.A	REVISE		
ROLINE HDMI UHD Cable, 10K, Dynamic HDR M/M, 1.5m, black			
Item	11.04.5941		SECOMP
Draw	Kobe	Date: 2018.10.18	
Approval			
Duty	F16	BOM.NO:	
Sample NO.		Drawings of 1 (1) Proportion: 1:1 Unit(mm)	A4