
Temperature Sensors

Thermoresistances


(RTS) Bayonet Bore Type with Silicone Cable

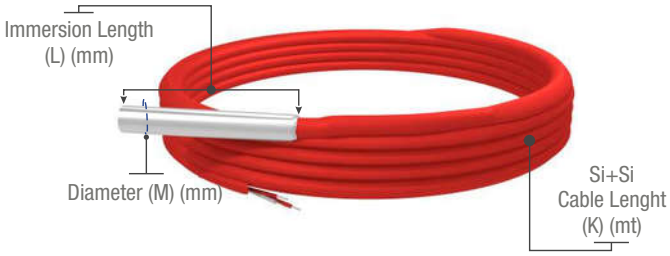

RTS – M □□ – L □□□ – K □□ .E

Diameter : Min: 3mm Max: 10mm


(RTST) Bayonet Bore Type with Teflon Cable

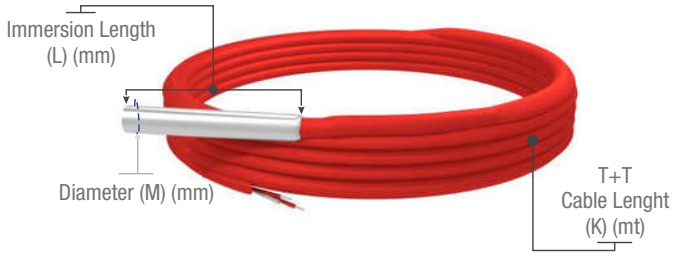

RTST – M □□ – L □□□ – K □□ .E

Diameter : Min: 4mm Max: 10mm

(RTSM) Bayonet Bore Type with Braided Wire Cable

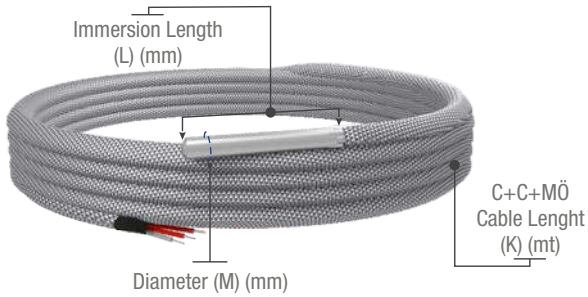

RTSM – M □□ – L □□□ – K □□

Diameter : Min:4mm Max: 16mm

(RTSKP5) Bayonet Type with Cable Lug



RT – K □□ – SKP5

SKP5 (M5 Screw)

Max. operating temperature	:	**400°C** for Braided wire, **200°C** for Silicone, **260°C** for Teflon
Standard cable types	:	Fiber glass + Fiber glass + Braided wire, 3x0,22 mm² / Silicone + Silicone, 3x0,22 mm² / Teflon + Teflon, 3x0,22 mm²
Standard cable length (K)	:	K01 = 1mt, K02 = 2mt, K03 = 3 mt, K04 = 4mt, K05 = 5 mt.
Sensor type	:	DIN/EN60751 Class "B'' 1xPt-100 for E=1 or 2xPt-100 for E=2
Protection tube material	:	AISI304 (DIN1.4301), AISI316 Order Code "316''