Laserliner

ArcView Camera

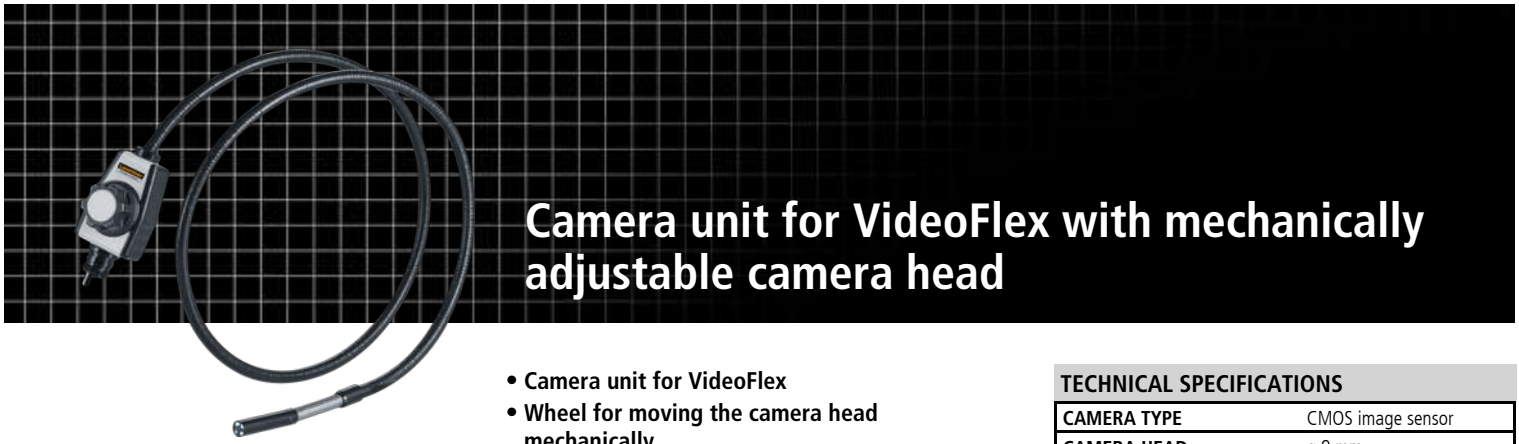

Camera unit for VideoFlex with mechanically adjustable camera head

- **Camera unit for VideoFlex**
- **Wheel for moving the camera head mechanically**
- **For inspecting highly inaccessible locations such as cavities, shafts, masonry or in vehicles**
- **Waterproof camera head and cable**
- **4 high-performance LEDs for powerful object lighting at the camera**
- **Compatible with G3/G4**





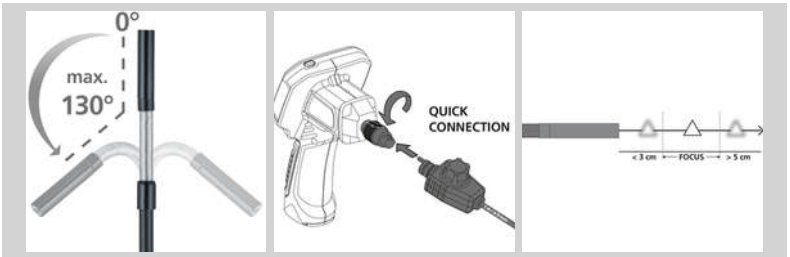



TECHNICAL SPECIFICATIONS

CAMERA TYPE	CMOS image sensor
CAMERA HEAD	ø 9 mm
CAMERA HEAD PROTECTION CLASS	water-resistant, IP 67
CAMERA HEAD LEDS	4
CAMERA RESOLUTION	640 x 480 pixels
FIELD OF VIEW (FOV)	57°
CAMERA FOCUS	F3 cm - F5 cm
CABLE DIAMETER	7,6 mm
LENGTH OF FLEX CABLE	1 m
MINIMUM BENDING RADIUS	100 mm
OPERATING CONDITIONS	0°C … 45°C, max. humidity 20 … 90% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C … 60°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	1120 mm x 39 mm x 38 mm
WEIGHT	268 g

ArcView Camera	**ORDER NO.** 082.214A	**EAN-CODE** 4021563707430	**PU** 1

UMAREX GmbH & Co. KG • Donnerfeld 2 • 59757 Arnsberg • Germany • Tel. +49 2932 638-300 • Fax +49 2932 638-333 • info@laserliner.com • www.laserliner.com