
P5X192D024UL

MOTOR OPERATOR FOR REMOTE OPERATION FOR P5ME…400/630, 24VDC, UL CERTIFIED




Product designation	Motor operator
Product type designation	P5X192D024UL
Description	Motor operator for remote operation for UL certified MCCBs..
Accessories for	Accessories for UL-compliant MCCBs

Operational characteristics		
Rated operational voltage	V	24VDC
Rated current (In)	A	≤2.5A
Mechanical operation	cycles/h	60
Average closing time	ms	500
Average opening time	ms	350
Power consumption	W	35
Mechanical features		
Weight	g	3500
Operations		
Mechanical life	cycles	20000
Dimensions		

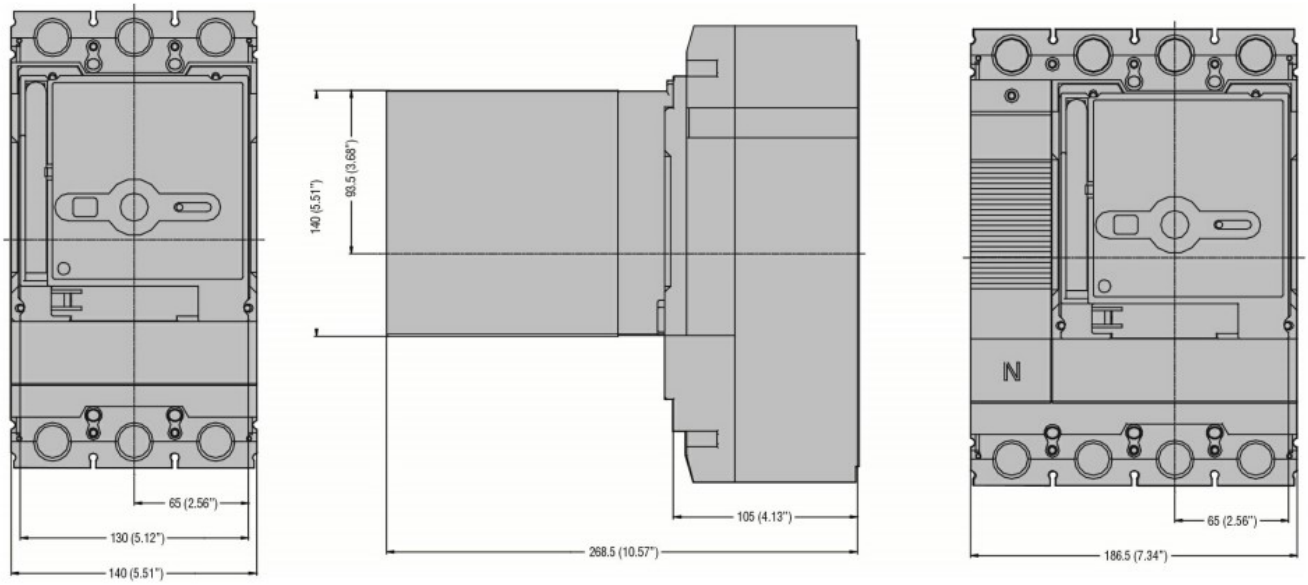

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

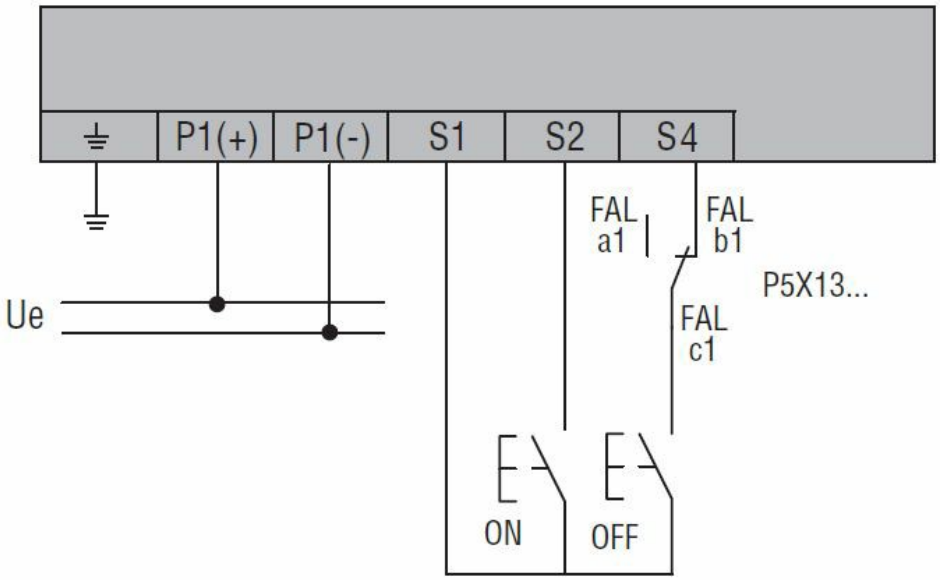

Note: Connect an NC contact of an alarm switch contact block in series with S4 to prevent remote closing of the MCCB after tripping due to overcurrent or short circuit.

Wiring diagrams

Certifications and compliance

Certificates

cULus

ETIM classification

EC000066 - Power contactor, AC switching

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding