
# 65 - Metric 15° hinged ratchet ring wrenches



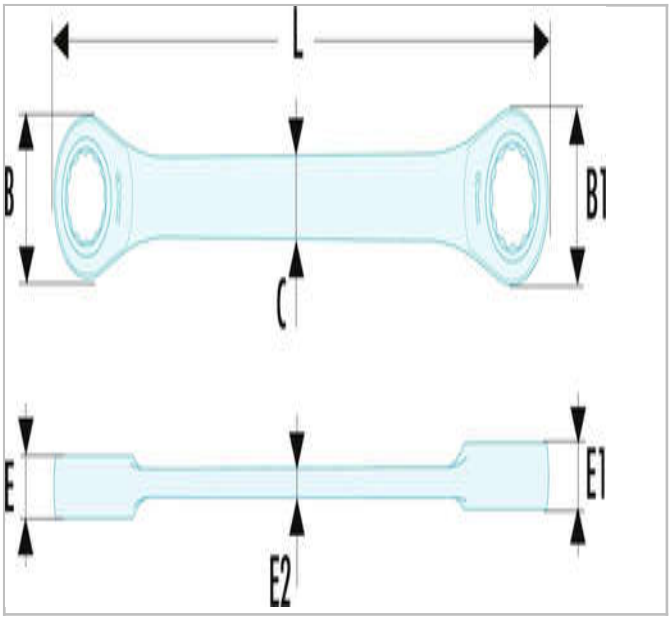


## Standards:

**NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691, ASME B107.100**

## Description:

- 15° hinged ratchet ring wrenches: ring offset to clear fingers or obstacles.
- Compact ratchet mechanism and reversible by lever.
- Increment 5° (7.5° for dimension 6 mm; 6° for dimensions 7, 8 and 9 mm).
- Ring head angled at 15°.
- Metric sizes: 6 to 24 mm.
- Presentation: satin chrome finish.

© FACOM 2020

| | A [mm] | Length L [mm] | Thickness E [mm] | Thickness E1 [mm] | Head Width B [mm] | Head Width B1 [mm] | Weight [Kg] |
|---|---|---|---|---|---|---|---|
| 65.10X11 | 10x11 | 150.0 | 7.3 | 7.7 | 20.2 | 22.0 | 0.065 |
| 65.12X13 | 12x13 | 170.0 | 8.2 | 8.6 | 23.4 | 25.5 | 0.9 |
| 65.14X15 | 14x15 | 190.0 | 9.0 | 9.4 | 26.9 | 29.8 | 0.13 |
| 65.16X18 | 16x18 | 210.0 | 9.9 | 10.7 | 29.8 | 34.0 | 0.19 |
| 65.17X19 | | 230.0 | 10.3 | 11.2 | 31.8 | 34.0 | 0.21 |
| 65.21X23 | 21x23 | 260.0 | 13.0 | 14.5 | 40.1 | 46.0 | 0.43 |
| 65.22X24 | 22x24 | 260.0 | 13.0 | 14.5 | 40.1 | 46.5 | 0.425 |
| 65.6X7 | 6x7 | 115.0 | 6.3 | 6.5 | 14.0 | 17.0 | 0.03 |
| 65.8X9 | 8x9 | 128.0 | 6.5 | 6.9 | 17.0 | 20.2 | 0.045 |

© FACOM 2020