

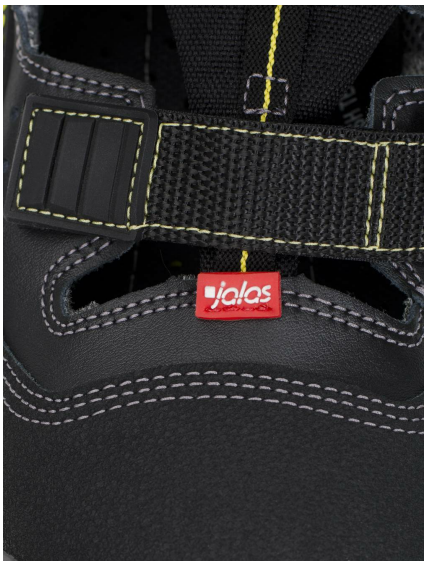

jalas® GRAN PREMIO 1518 ANTISLIP +

EN ISO 20345:2011 S1, P, SRC, HRO

Learn more

SANDAL THAT BREATHES, WITH A SPACIOUS LAST

With all the necessary safety features for those who prioritize comfort and cool feet. The sandal is ventilated and has a spacious last. Hook and loop closure, nail protection in steel and toe cap in aluminium. Heat-resistant outsole. Perfect for environments where breathability is wanted.

CHARACTERISTICS

- Highest level of protection
- Excellent grip
- Perfect fit
- Extra comfortable
- Excellent shock absorption
- Very breathable

FUNCTIONS

- ProNose toe reinforcement
- Wide fit
- Heat-resistant outsole
- Oil-resistant outsole
- Anti-static properties
- Ventilating insole
- Double shock absorption zones
- Conforms with IEC 61340-5-1 (ESD)

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF

Toe injuries, nail penetration, antistatic

PRIMARY ENVIRONMENTS OF USE

Indoors, environments with risk for outsole penetration

SPECIFICATION

TYPE Safety footwear, Sandals
CATEGORY Cat. II
NAIL PROTECTION MATERIAL Steel
FITTING Wide
COLLECTION Gran Premio
UPPER MATERIAL PU-coated leather
PRONOSE MATERIAL PU
TOECAP MATERIAL Aluminium
LINING MATERIAL Polyester, polyamide
INSOLE FX2 Pro-X
INNERSOLE MATERIAL Textile, Soft EVA, Polyester-based conductive thread, Double shock absorption zones in Poron® XRD®
MIDSOLE MATERIAL PU midsole
OUTSOLE MATERIAL Nitrile rubber outsole
FASTENING Hook-and-loop
COLOUR Black, Grey, Yellow
NET WEIGHT, (SIZE 42) 1.23 kg

COMPLIANCE

CE Cat. II

EAC TP TC 019:2011

EN ISO 20345:2011
S1, P, SRC, HRO

ÖNORM Z 1259

DGUV 112-191

FEATURES

- Anti-static properties
- Ergothan Shock Absorption System
- ESD
- Aluminium toecap
- Oil-resistant outsole
- ProNose toe reinforcement
- Wide fit
- Heat-resistant outsole
- Nail protection in steel

SIZE				ARTICLE NUMBER	EAN
EU	UK	US M	US W		
35	2	3½	4	1518-35	6408487502132
36	3	4	5	1518-36	6408487500435
37	4	5	6	1518-37	6408487500442
38	5	5½	6½	1518-38	6408487500459
39	6	6½	7½	1518-39	6408487500466
40	6½	7½	8½	1518-40	6408487500473
41	7	8	9	1518-41	6408487500480
42	8	9	10	1518-42	6408487500497
43	9	9½	11	1518-43	6408487500503
44	10	10½	11½	1518-44	6408487500510
45	10½	11	12½	1518-45	6408487500527
46	11	12	13	1518-46	6408487500534
47	12	13	14	1518-47	6408487500541
48	13	13½	14½	1518-48	6408487500558
49	14	14½	15½	1518-49	6408487502149
50	15	15½	16½	1518-50	6408487502156

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.