HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Test probes

4 mm safety system

PRUEF 2700

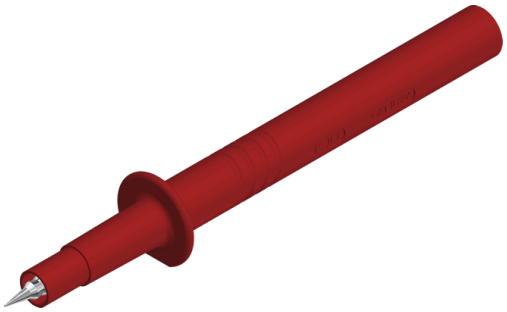

CE

Product	PRUEF 2700
description	Safety test probe with dual function. Tip for penetrating oxide layers and 4 mm diameter pin for insertion in sockets. 4 mm diameter brass socket connection. Connects with safety measuring leads.
operating instruction	BA463
article-no. / *colour	9723191xx ● 00 black ● 01 red Ni
drawing	
	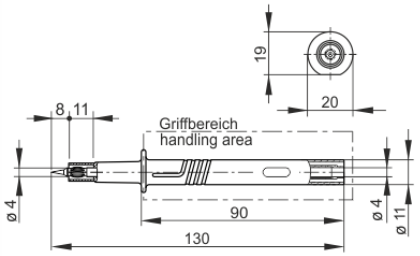
technical data	
connection	unsprung socket 4 mm
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current(1) (consider derating curve)	32 A
material socket	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010(2)	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C

[2] contact the manufacturer for applications at deviating temperature ranges
stand: 19.06.2019