
I27008

Inductive area sensor

SIY-3120-BPKG/A-PLATE/0,6M/US

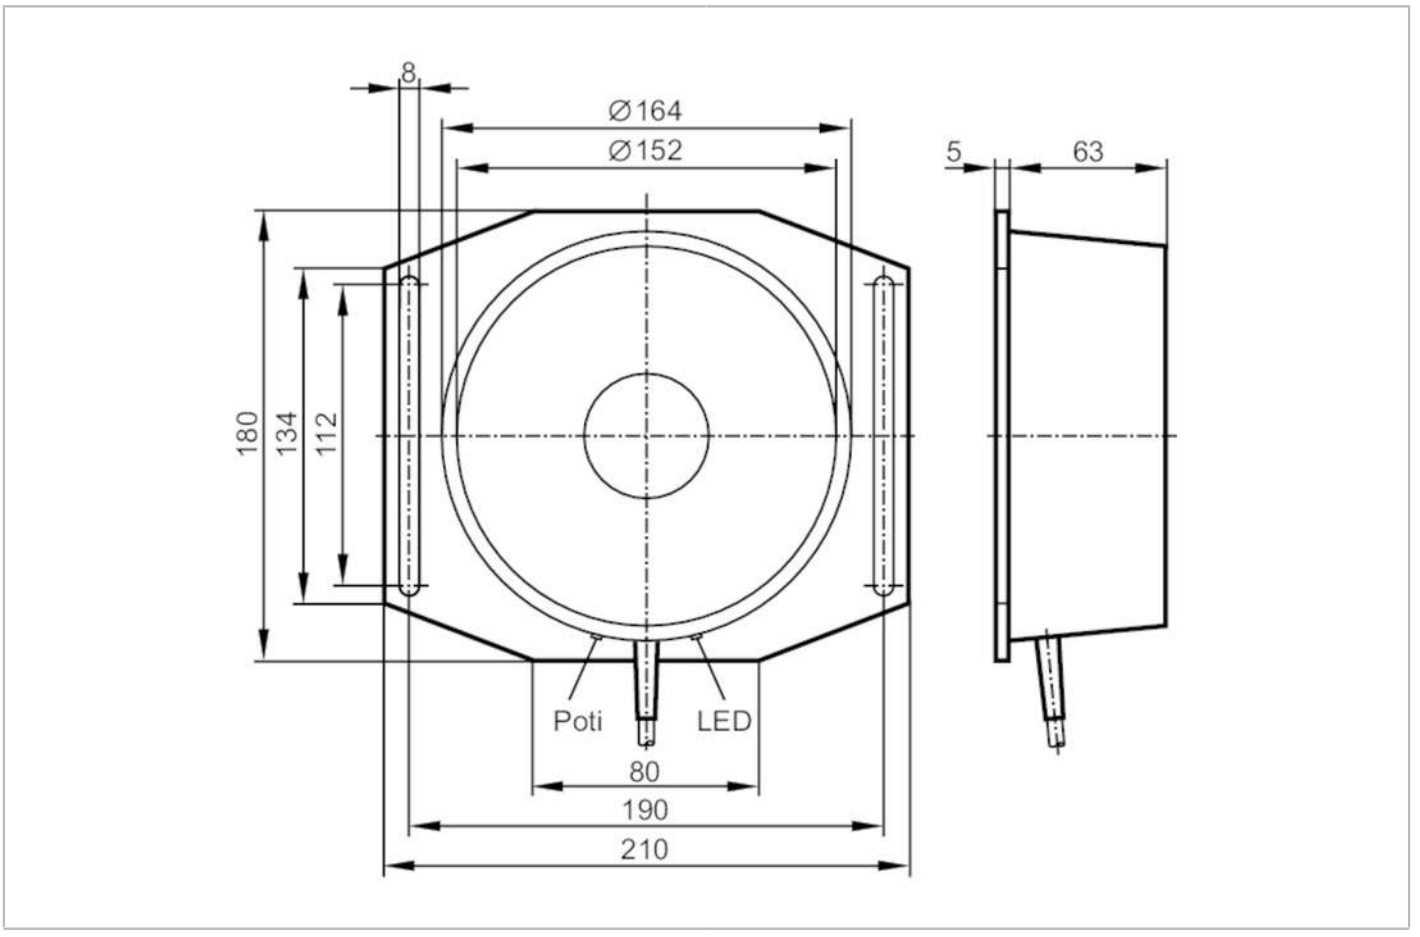


Product characteristics		
Electrical design		PNP
Output function		normally open
Sensing range	[mm]	30...120
Housing		cylindrical
Dimensions	[mm]	180 x 210 x 68
Electrical data		
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	3
Short-circuit protection		yes

I27008

Inductive area sensor

SIY-3120-BPKG/A-PLATE/0,6M/US

Type of short-circuit protection		pulsed	
Overload protection		yes	
Detection zone			
Sensing range	[mm]	30...120	
Sensing range adjustable		yes	
Factory setting sensing range	[mm]	120	
Real sensing range Sr	[mm]	120 ± 10 %	
Accuracy / deviations			
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	< 15	
Switch point drift	[% of Sr]	-15...15	
Operating conditions			
Ambient temperature	[°C]	-20...70	
Protection		IP 65	
Tests / approvals			
EMC		EN 60947-5-2	
Mechanical data			
Weight	[g]	1582.5	
Housing		cylindrical	
Mounting		non-flush mountable	
Type of mounting		with mounting plate	
Dimensions	[mm]	180 x 210 x 68	
Materials		housing: PBT; Mounting plate: aluminium anodised	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Remarks			
Pack quantity		1 pcs.	
Electrical connection			




I27008

Inductive area sensor

SIY-3120-BPKG/A-PLATE/0,6M/US

Connection

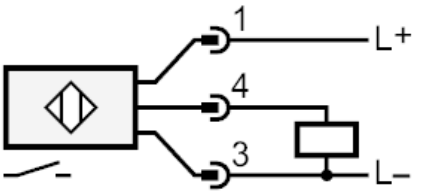

Electrical connection - plug

Cable: 0.6 m, PVC; 3 x 0.5 mm²

Connector: 1 x M12