HIRSCHMANN® Test & Measurement
A BRAND OF SKS

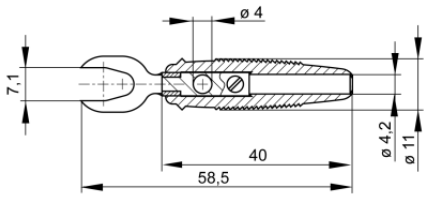
SKS Kontakttechnik GmbH

Plugs

KB 2



CE

Product	KB 2
description	Cable lug with shatter-proof, flexible insulated sleeve with 4 mm diameter transverse hole. Screw connection up to a maximum of 1.5 mm². For connection to bolts from 4 mm to 7 mm diameter. Nickel-plated brass contact material.
operating instruction	BA410
article-no. / *colour	9305841xx 00 black · 01 red · 02 blue · 03 yellow · 04 green Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O [2]
rated current (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010[1]	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

4 mm system

[1] contact the manufacturer for applications at deviating temperature ranges
[2] without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022