multimec®

Round cap with soft edges

5G + 1DS/1ES/1FS




- Round caps
- Ø9.6 mm
- h =14.9 mm
- Material: ABS/polycarbonate
- Temp. Range:
  - Solid cap: -40/+65°C
  - Transparent cap :-40/+85°C
- Panel cut-out: 1DS/1ES/1FS-Ø10.0


All dimensions in mm

DIMENSIONS


TH + 1DS

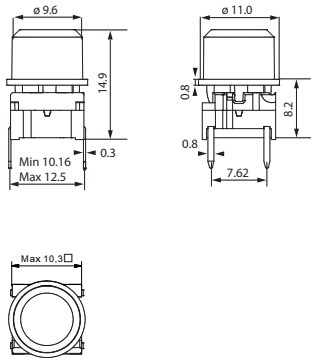

SMD w/LED + 1ES

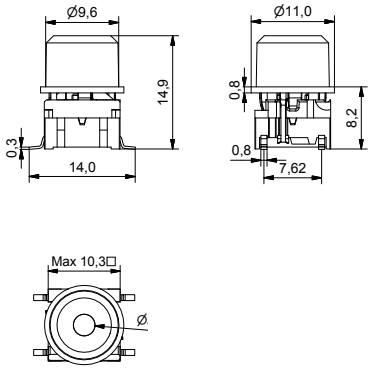

TH w/LED + 1FS

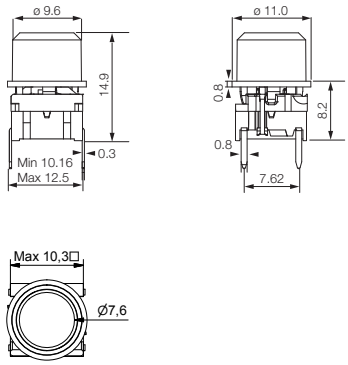

ILLUMINATED – HOW TO ORDER

Switch	Mounting	Actuation force	LED		Cap	Colour code	Lens
5 G				+			
	TH9 through-hole **SH9** surface mount	**20** **35** **65** **Q***	**01** blue **22** green **42** yellow **61** white **82** red **2242** green/yellow **8222** red/green **8242** red/yellow		**1ES**  **1FS** 	**00** blue **03** grey **08** red **09** black	**1** transparent **2** green **4** yellow **8** red **6** brosted white
					1DS 	**11** transparent **16** frosted white	

*For an illuminated quiet 2.0N switch add Q to the end of the switch part number.

NON-ILLUMINATED– HOW TO ORDER

Switch	Mounting	Actuation force		Cap	Colour code
5 G			+		
	TH9 through-hole **SH9** surface mount	**20** **20Q** **35** **65**		**1DS** 	**00** blue **02** green **03** grey **04** yellow **06** white **08** red **09** black

Ordering example: 5GTH935+1DS06 without illumination OR 5GSH96561+1FS096 with illumination OR *5GSH92042Q (illuminated quiet version)

Please see colour codes, updates of products and changes of specifications on www.mec.dk