
HIRSCHMANN® Test & Measurement
A BRAND OF SKS


SKS Kontakttechnik GmbH

## Measuring leads

# PL 2700 S

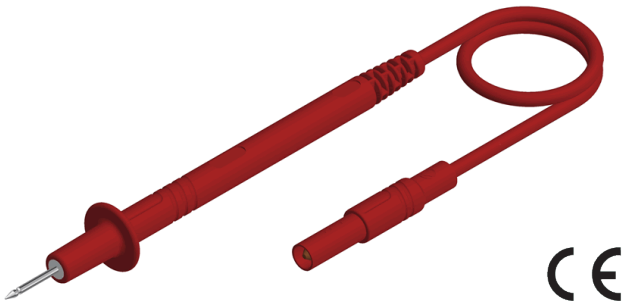

4 mm safety system
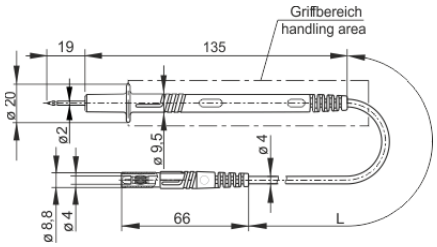
| Product | PL 2700 S |
|---|---|
| description | Safety test lead with test probe. Tip for penetration of oxide layers and 4 mm diameter safety connector with straight outlet.<br>Highly flexible, double insulated stranded lead, shatter-proof grip sleeve and lead. Built in color indicator for easy indentification of insulation damages. |
| article-no. /<br>*colour | 9341561xx<br>00 black<br>01 red<br>Ni |
| **drawing** | |
| |  |
| **technical data** | |
| rated voltage(1) | AC/DC 1000 V |
| measurement cat. acc. to IEC 61010 | CAT II |
| rated current(1)<br>(consider derating curve) | 16 A |
| material plug | brass, nickel plated |
| housing material | PA, PP |
| temperature range acc. To IEC61010(2) | -15 °C to +70 °C |
| inflammability class acc. to UL 94<br>(only valid for basic material of housing) | HB |
| cable length | 100 cm |
| conductor size | 1 mm² |
| cable material | PVC |

| | |
|---|---|
| contact resistance | 20 mOhm |
| standard | IEC 61010 |

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
stand: 21.03.2019