
913068 TERMORESISTENTE KLL 125



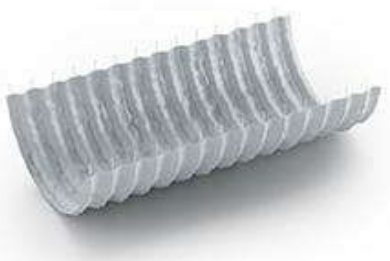

Hose made of polyester textile covered with PVC with galvanised steel spiral between two layers of tissue, for air-conditioning, suction of fumes and warm air.

SMOOTH SURFACES	**
FLEXIBILITY	*****
ABRASION RESISTANCE	**
TEMPERATURE RANGE	AT -10°C for short periods up to -20°C +110°C 23°F +176°F
CHEMICAL RESISTANCE	PVC table
CRUSHING RESISTANCE	***
SELF-EXTINGUISHING	DM 26.06.1984 with test methods UNI 8457-8757/A1-9174-9174/A1.

Ø I.D.	Ø I.D.	Ø O.D.	WALL THICKNESS	TOTAL THICKNESS	WEIGHT	BENDING RADIUS	WORKING PRESSURE 1:3 23°C	VACUUM 23°C	SPIRAL PITCH	SPIRAL DIRECTION	Ø SPIRAL	COIL LENGTH	AVAILABILITY
inch	mm	mm	mm	mm	g/m	mm	bar	m h2o	mm		mm	m	
	40	44	0.22	-	85	20	0.55	1	20	left	0.8	12	IN STOCK
2	**51**	54	0.22	-	105	25	0.5	0.95	20	left	0.8	12	IN STOCK
2 1/2	**63**	66	0.22	-	130	31	0.45	0.9	20	left	0.8	12	IN STOCK
	70	73	0.22	-	145	35	0.43	0.85	20	left	0.8	12	IN STOCK
3	**76**	79	0.22	-	155	36	0.4	0.8	20	left	0.8	12	IN STOCK
	82	85	0.22	-	170	41	0.38	0.75	20	left	0.8	12	IN STOCK
3 1/2	**89**	92	0.22	-	180	44	0.3	0.7	20	left	0.8	12	IN STOCK
4	**102**	105	0.22	-	215	51	0.25	0.65	25	left	1	12	IN STOCK
	108	111	0.22	-	230	54	0.23	0.6	25	left	1	12	ON DEMAND
	114	117	0.22	-	240	57	0.21	0.55	25	left	1	12	IN STOCK
	121	124	0.22	-	255	60	0.2	0.5	25	left	1	12	IN STOCK
5	**127**	130	0.22	-	265	63	0.18	0.45	25	left	1	12	IN STOCK
	133	136	0.22	-	280	66	0.16	0.4	25	left	1	12	IN STOCK
	140	143	0.22	-	295	70	0.15	0.38	25	left	1	12	IN STOCK
6	**152**	156	0.22	-	380	76	0.14	0.35	32	left	1.4	12	IN STOCK
	160	165	0.22	-	410	80	0.12	0.32	32	left	1.4	12	ON DEMAND
	165	169	0.22	-	420	82	0.12	0.3	32	left	1.4	12	IN STOCK
	178	182	0.22	-	450	89	0.1	0.25	32	left	1.4	12	IN STOCK
8	**203**	207	0.22	-	510	101	0.08	0.2	32	left	1.4	12	IN STOCK
9	**228**	232	0.22	-	570	114	0.06	0.15	32	left	1.4	12	IN STOCK
10	**254**	258	0.22	-	640	127	0.05	0.12	40	left	1.6	12	IN STOCK
	279	283	0.22	-	700	139	0.04	0.1	40	left	1.6	12	IN STOCK
12	**304**	308	0.22	-	770	152	0.03	0.05	40	left	1.6	12	IN STOCK
	330	334	0.22	-	830	165	0.02	0.03	40	left	1.6	12	IN STOCK
14	**355**	359	0.22	-	890	177	0.02	0.02	40	left	1.6	12	IN STOCK
16	**406**	410	0.22	-	1030	203	0.02	0.01	40	left	1.6	12	IN STOCK
18	**457**	462	0.22	-	1300	228	0.01	0.0005	40	left	1.8	12	IN STOCK
20	**508**	513	0.22	-	1450	254	0.01	0.0004	40	left	1.8	12	IN STOCK
22	**558**	563	0.22	-	1580	279	0.01	0.0003	40	left	1.8	12	IN STOCK
25	**610**	615	0.22	-	1730	305	0.01	0.0002	40	left	1.8	12	IN STOCK

All technical specifications apply to a temperature of 23°C ± 2°C (ISO 291). - Tolerance on all specifications ± 5%.