# PROTWIST® SCREWDRIVERS FOR POZIDRIV® SCREWS - ROUND BLADES

| SKU | DESCRIPTION |
|---|---|
| **ATD4X200** | PROTWIST SD PZ 4X200 STD |


**X4 CORROSION RESISTANCE**
Blade " tri-coating " treatment (Zinc-Nickel-Chromium)

**STANDARDS**
NF ISO 8764-1, NF ISO 8764-2, ISO 8764-1, ISO 8764-2, DIN ISO 8764-1, DIN ISO 8764-2, ASME B107.600




**CONFORTABLE**
Handle Material - Softer for more Comfort and still Chemical Resistant.

**HIGH QUALITY**
Inline Hardening Process – +100% Tip Life and +100% Bar Strength

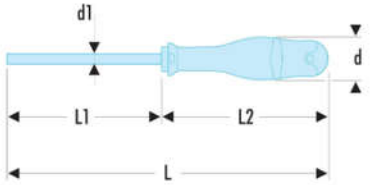


| | DIAMETER [MM] | DIAMETER D1 [MM] | LENGTH L1 [MM] | LENGTH L [MM] | LENGTH L2 [MM] | POZIDRIV TIP NUMBER [*] | WEIGHT [G] |
|---|---|---|---|---|---|---|---|
| ATD0X75 | 25.0 | 3.0 | 75.0 | 178.0 | 103.0 | PZ0 | 45.0 |
| ATD1X100 | 30.0 | 4.5 | 100.0 | 209.0 | 109.0 | PZ1 | 76.0 |
| ATD1X250 | 30.0 | 4.5 | 250.0 | 359.0 | 109.0 | PZ1 | 99.0 |
| ATD1X75 | 30.0 | 4.5 | 75.0 | 184.0 | 109.0 | PZ1 | 73.0 |
| ATD2X100 | 36.0 | 6.0 | 100.0 | 220.0 | 120.0 | PZ2 | 120.0 |
| ATD2X125 | 36.0 | 6.0 | 125.0 | 245.0 | 120.0 | PZ2 | 126.0 |
| ATD2X250 | 36.0 | 6.0 | 250.0 | 370.0 | 120.0 | PZ2 | 153.0 |
| ATD3X150 | 40.0 | 8.0 | 150.0 | 275.0 | 125.0 | PZ3 | 194.0 |
| ATD4X200 | 40.0 | 10.0 | 200.0 | 325.0 | 125.0 | PZ4 | 277.0 |