
Camatril® 730

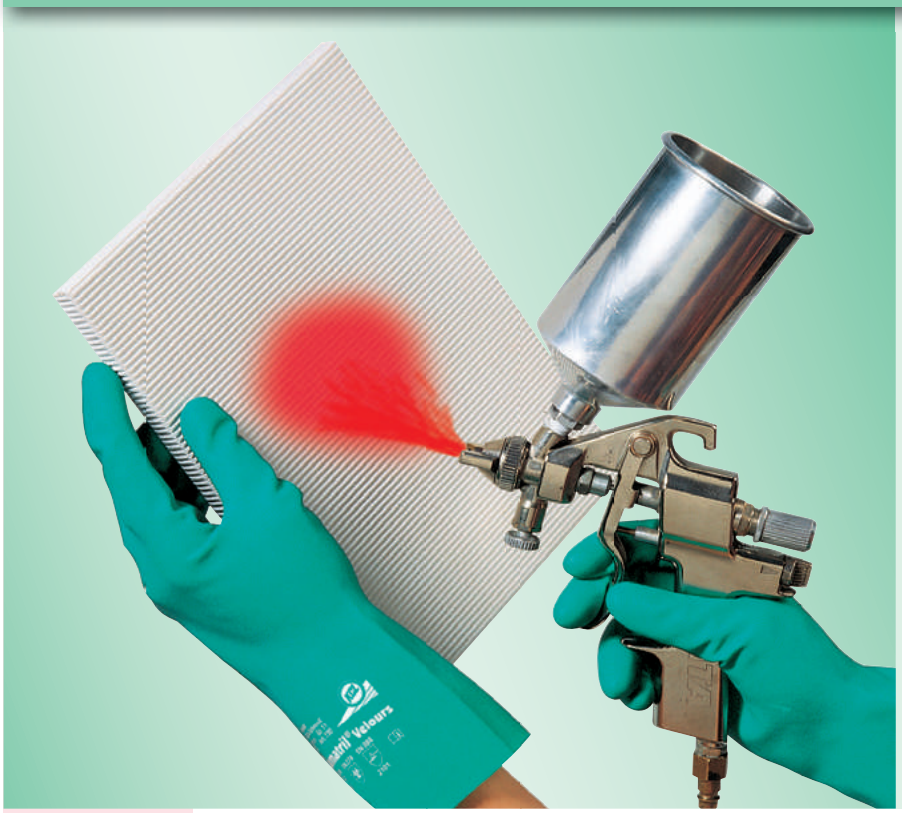

Application

- automotive and supply industry
- petrochemistry and printing industry
- paint shops
- laboratory work
- chemical industry
- maintenance and cleaning
- food industry
- handling of epoxy resins

Qualities and advantages

- good sensitivity
- good temperature flexibility
- high mechanical resistance
- good resistance against a variety of hazardous substance groups

Article no. **Name**	**730** Camatril® 730
Material	nitrile
Description	cuff, roughened, flock lined
Length (mm) **Total thickness (mm)**	300-320 0,4 ± 0,05
Colour **Size**	green 7, 8, 9, 10, 11
Classification	category III EN388:2016 3001X; ISO 374-1:2016/Type A TKLJAO; ISO 374-5:2016 Micro-Organisms





Features

- AQL ‹ 0,65
- absolutely silicone-free and lacquer indifferent
- food safety according to EU 1935/2004

www.kcl.de
sales@kcl.de

KCL GmbH
Industriepark Rhoen
Am Kreuzacker 9
36124 Eichenzell
Germany
Phone +49 6659 87-300
Fax +49 6659 87-318

by Honeywell

V240818 GB

Honeywell