# DIRECT SOLENOID VALVE
# SV32C

## DESCRIPTION

3/2 Way solenoid valves are available as single station units. Standard valve is normally closed and comes with one plug.

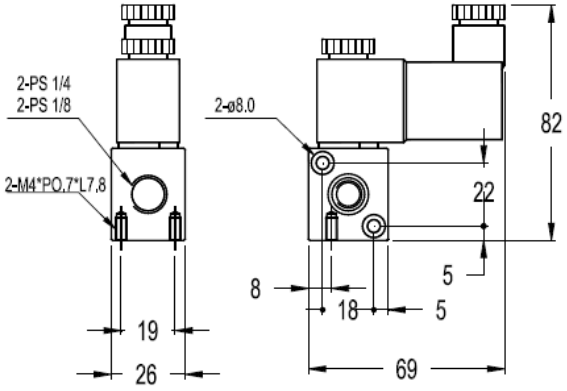


## MAIN FEATURES

Port size: ¼"
Fluid: compressed air (filtered through 40 microns filter elements)
Sectional area: 1,5mm2
Operating: Inner spring return
Max. pressure: 10 bar
Temperature range: -10 °C to 60 °C
Coil type: DIN
Protection: IP65 (DIN 40 050)
Standard voltage: 220VAC, 24 VDC, 24 VAC

## BODY MATERIAL

Aluminium alloy

# D-LUX DIGITAL TIMERS

| SPECIFICATIONS | |
|---|---|
| ***TIMER*** | |
| Interval time | 0,5 - 45 minutes |
| Discharge time | 0,5 - 10 seconds |
| Supply voltage | 240 V (24V on request) |
| Current consumption | 4 mA Max. |
| Operating temperature | -40ºC to +60ºC |
| Environmental protection | IP 65 |
| Housing material | ABS Plastic FR grade |
| Connection | DIN 43650A ISO 4400/6952 |
| Indicators | 1LED (yellow) to indicate on phase |
| | 1LED (yellow) to indicate off phase |

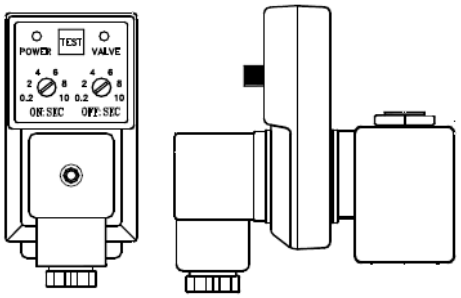


**NOTE : SEE DATA SHEET REFERENCE 'IMI.2.145.E.09.13' FOR FURTHER INFORMATION**


We reserve the right to change the design and material of this product without notice.