HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

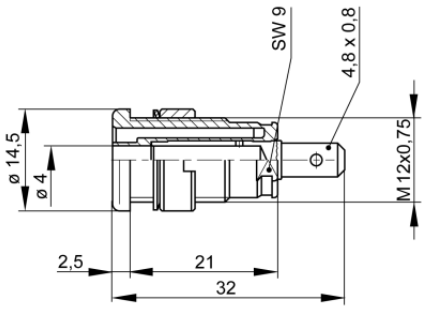
Sockets

4 mm safety system

SEB 2610 F4,8 Ni



CE

Product	SEB 2610 F4,8 Ni
description	Safety built-in socket, 4 mm diameter, contact-protected, with 4.8 x 0.8 tab connector complying with DIN 46 244, nickel-plated brass. For installation into switchpanels and equipment chassis with wall thicknesses up to 6 mm. Installation hole: 12.2 mm diameter, Tightening torque: 50 Ncm, Accessory: assembly tool MW SEB
operating instruction	BA451
article-no. / *colour	9723552xx 00 black · 01 red · 02 blue · 03 yellow · 04 green Ni
drawing	
	
technical data	
connection	flat connector 4.8 x 0.8 mm
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current(1) (consider derating curve)	25 A
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010(2)	-40 °C to +80 °C

inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1) for normal environmental conditions 5°C to 40°C
(2) contact the manufacturer for applications at deviating temperature ranges
stand: 09.06.2022