
# E12205

## Ethernet connection cable

VSTGN040ZDS0020L04STGP040--S

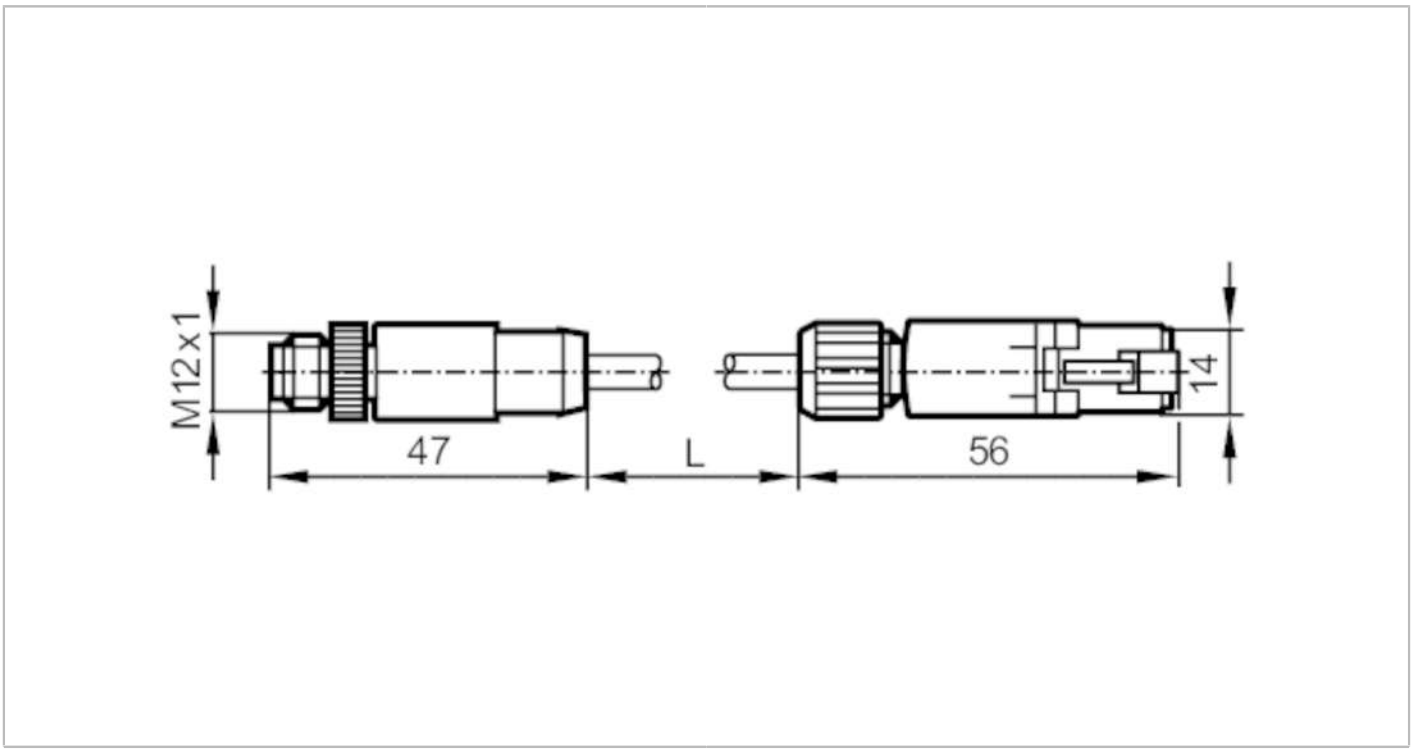


CE

| | | |
|---|---|---|
| **Application** | | |
| Special feature | | Screened cable |
| Design | | Ethernet cable, D-coded |
| Application | | patch cable |
| **Operating conditions** | | |
| Ambient temperature | [°C] | -25...70 |
| Protection | | IP 67; IP 42;  (M12 plug / RJ45 plug) |
| **Mechanical data** | | |
| Weight | [g] | 1357 |
| Materials | | PUR / PC |
| Moulded-body material | | PUR / PC |
| Material nut | | diecast zinc, nickel-plated |
| **Remarks** | | |
| Pack quantity | | 1 pcs. |

**Electrical connection - plug M12**

Connector: 1 x M12, straight; coding: D; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Tightening torque: 0.7...0.9 Nm



# E12205


## Ethernet connection cable

VSTGN040ZDS0020L04STGP040--S

### Electrical connection

Cable: 20 m, PVC, green, Ø 6.2 mm, shielded; 4 x 0.38 mm²

Connection

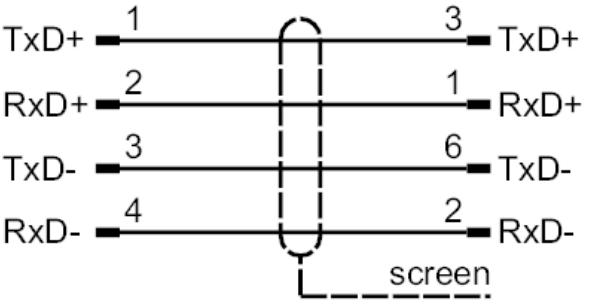


### Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Moulded body: PC

