Swifts® cable tray supports

SS light duty, MRF medium duty, SRF heavy duty, XRF extra heavy duty


12 or 18 | 25 | 50 | 80



LCA 150 PG



CKP 25


OH 150 PG


LTH 300 PG


LTH 100 PG

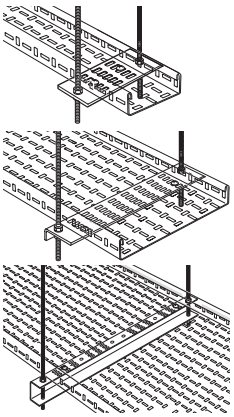

STB 300 PG


STB 450 PG

Dimensions and technical information **p. 94-98**

Pack	Cat. Nos.	Supports
		Cantilever arms Supplied singly without fasteners Fit horizontal runs of tray to flat surfaces and Swiftrack channel. Suitable for all tray widths For technical information, **p. 94-95**
1	LCA 50 F	50 mm
1	LCA 75 F	75 mm
1	LCA 100 F	100 mm
1	LCA 150 F	150 mm
1	LCA 225 F	225 mm
1	LCA 300 F	300 mm
1	LCA 450 F	450 mm
1	LCA 600 F	600 mm
1	LCA 750 F	750 mm
1	LCA 900 F	900 mm
		Easi-clip Used to connect tray to Swiftrack channel Zinc coated finish
50	CKP 25	For MRF tray
50	CKP 50	For SRF tray
		Overhead hangers Supplied singly without fasteners Support horizontal runs of lightly loaded tray up to 150 mm wide from overhead structures Use M10 threaded rod For technical information, **p. 96**
1	OH 50 F	50 mm
1	OH 75 F	75 mm
1	OH 100 F	100 mm
1	OH 150 F	150 mm

Pack	Cat. Nos.	Supports (continued)
		Trapeze hangers Supplied singly without fasteners Support horizontal runs of tray from overhead structures Up to 450 mm wide use M10 threaded rods. For 600 mm wide and above use M12 threaded rods For technical information, **p. 97**
1	LTH 50 F	50 mm
1	LTH 75 F	75 mm
1	LTH 100 F	100 mm
1	LTH 150 F	150 mm
1	LTH 225 F	225 mm
1	LTH 300 F	300 mm
1	LTH 450 F	450 mm
1	LTH 600 F	600 mm
1	LTH 750 F	750 mm
1	LTH 900 F	900 mm
		Stand-off brackets Supplied singly without fasteners Fit vertical or horizontal runs of tray to vertical surfaces, floors and Swiftrack channel For technical information, **p. 98**
1	STB 50 F	50 mm
1	STB 75 F	75 mm
1	STB 100 F	100 mm
1	STB 150 F	150 mm
1	STB 225 F	225 mm
1	STB 300 F	300 mm
1	STB 450 F	450 mm
1	STB 600 F	600 mm
1	STB 750 F	750 mm
1	STB 900 F	900 mm



Key : selecting supports. Replace the letters shown in red with your choice from the following options :
F = Finish : G (hot dip galvanised after manufacture),
D (deep galvanised), PG (pre-galvanised)
S (stainless steel), E (powder coated black RAL 9005)