
E11510

Wirable socket

SDOAH042MSSFKPG

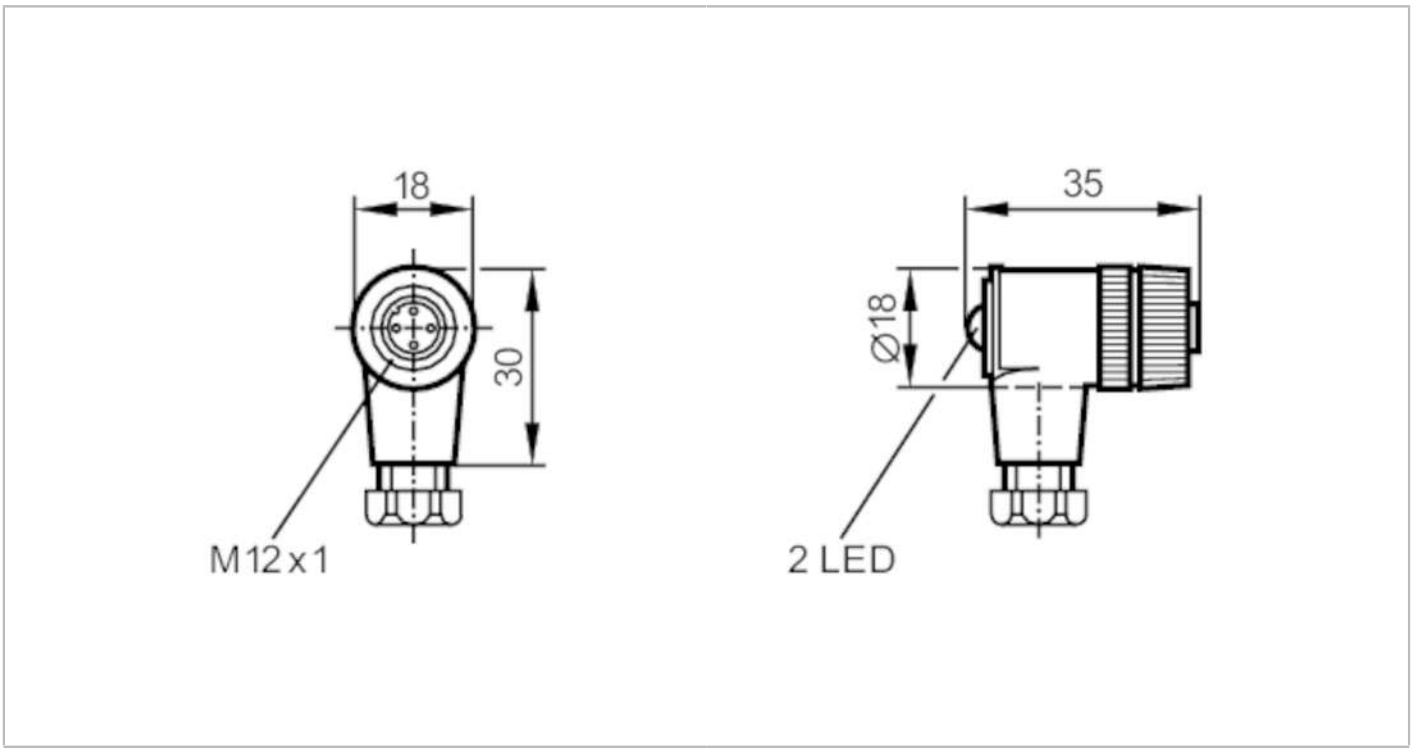

Application			
Special feature		Free from silicone; Gold-plated contacts	
Free from silicone		yes	
Electrical data			
Operating voltage	[V]	10...30 DC	
Max. current load total	[A]	4; (...40 °C)	
Outputs			
Electrical design		PNP	
Operating conditions			
Ambient temperature	[°C]	-25...85	
Protection		IP 68	
Mechanical data			
Weight	[g]	28.6	
Dimensions	[mm]	30 x 18 x 35	
Materials		PA	
Moulded-body material		PA	
Material nut		brass, nickel-plated	
Displays / operating elements			
Display		switching status	1 x LED, yellow
		operation	1 x LED, green
Remarks			
Pack quantity		1 pcs.	

E11510

Wirable socket

SDOAH042MSSFKPG

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

Electrical connection - socket

Connector: 1 x M12, angled; coding: A; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

