


2-Port DisplayPort KVM Switch

TK-241DP (1.0R)

- DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with DisplayPort systems
- Resolutions & refresh rates
  - Up to 1920 x 1080 @ 144Hz
  - Up to 1920 x 1200 @ 144Hz
  - Up to 1920 x 1440 @ 144Hz
  - Up to 2560 x 1440 @ 144Hz
  - Up to 3440 x 1440 @ 60Hz
  - Up to 3840 x 2160 @ 60Hz
- 2-Port USB 2.0 hub for storage devices and other USB peripherals
- Required cabling sold separately (2x TK-CP06)
- No CD installation required


TRENDnet's 2-Port DisplayPort KVM Switch, model TK-241DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolution with this DisplayPort KVM switch, no driver installation required. The TK-241DP DisplayPort KVM switch is designed for systems with DisplayPort, USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or other USB peripherals between computers.



DisplayPort 1.2
Designed to connect to two DisplayPort computers.





4K UHD Resolution
Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz).

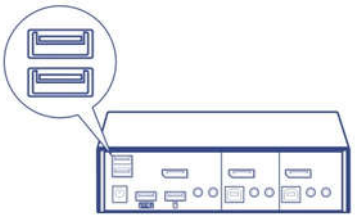

USB 2.0 Hub
Two additional USB ports to connect storage drives and other USB peripherals.

NETWORKING SOLUTION

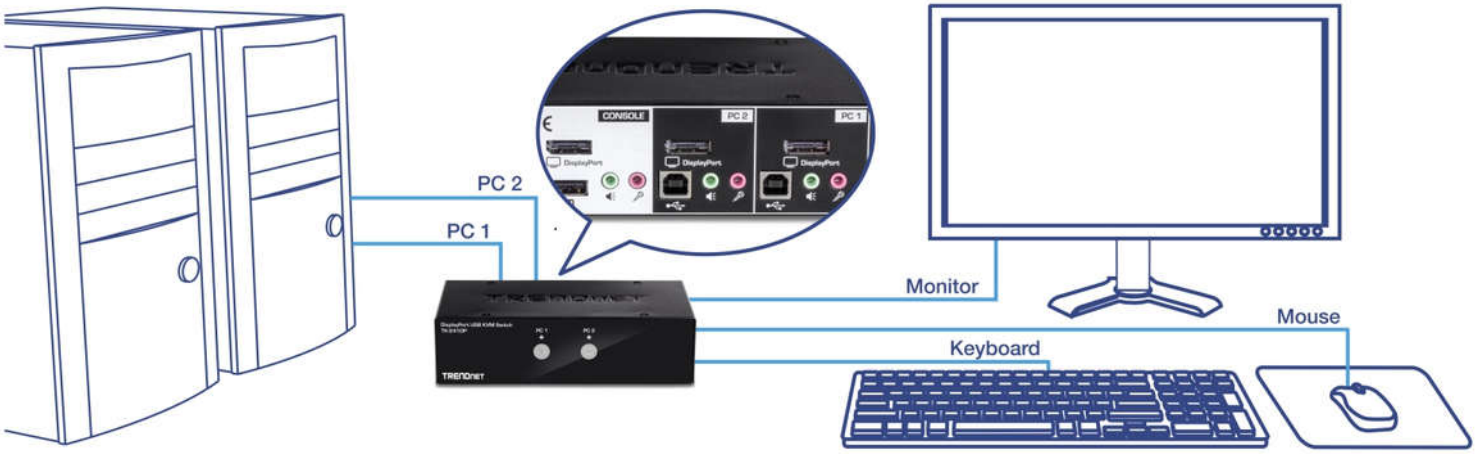

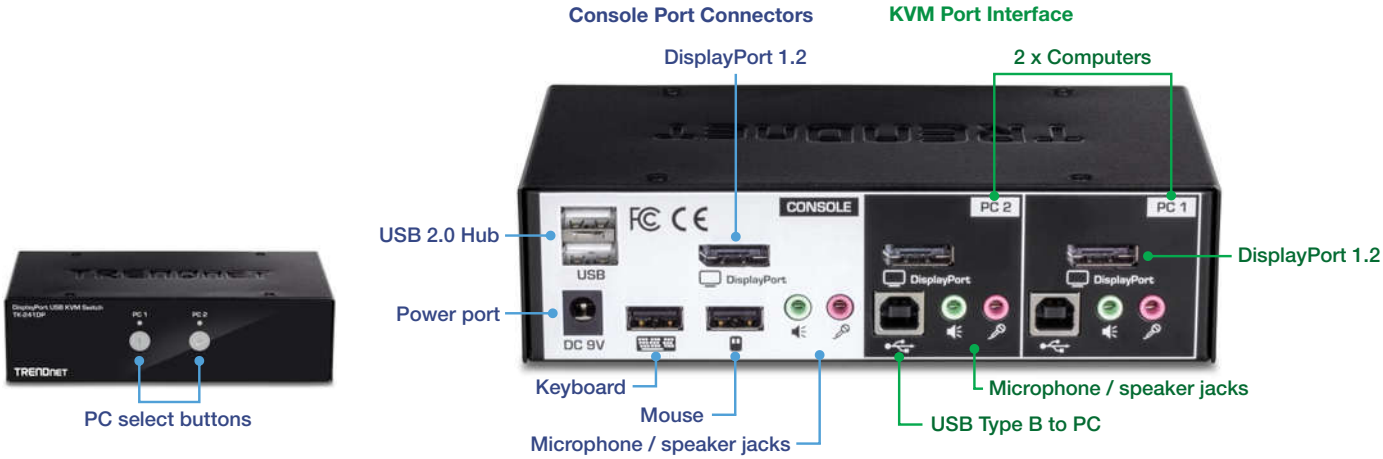

FEATURES

2-Port Monitor KVM
Control up to two separate computers with up to 4K resolution

DisplayPort Monitor
Designed to connect to two DisplayPort computers

4K UHD
Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)

Audio Support
Full audio support maximizes work station productivity

USB Mouse & Keyboard
True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs

Housing
DisplayPort KVM switch with rugged metal enclosure

USB 2.0 Hub
Two additional USB ports to connect storage drives and other USB peripherals

Hot Keys
Hot Key command shortcuts

Easy Installation
DisplayPort KVM switch features simple setup with driverless installation

SPECIFICATIONS

Console Port Connectors
- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 1 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

KVM Port Interface (up to 2)
- Keyboard/Mouse: USB Type B
- Monitors: 1 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Computer Interface (up to 2)
- Keyboard/Mouse: USB Type A
- Monitors: 1 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Monitor Resolution
- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

Switching Control
- Front panel push buttons
- Keyboard hot key commands

Operating Temperature
- 0° – 40° C (32° – 104° F)

Operating Humidity
- Max. 90% non-condensing

Power
- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

Dimensions
- 253 x 101 x 44mm (9.9 x 3.9 x 1.7 in.)

Weight
- 920g (2.02 lbs.)

Warranty
- 2 year

Certifications
- CE
- FCC

Package Contents
- TK-241DP
- Quick Installation Guide
- Power adapter (9V DC, 1A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • sales@trendnet.com • www.TRENDnet.com

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.

Updated: 5/7/2021