THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/28/13	D.GRIFFIN

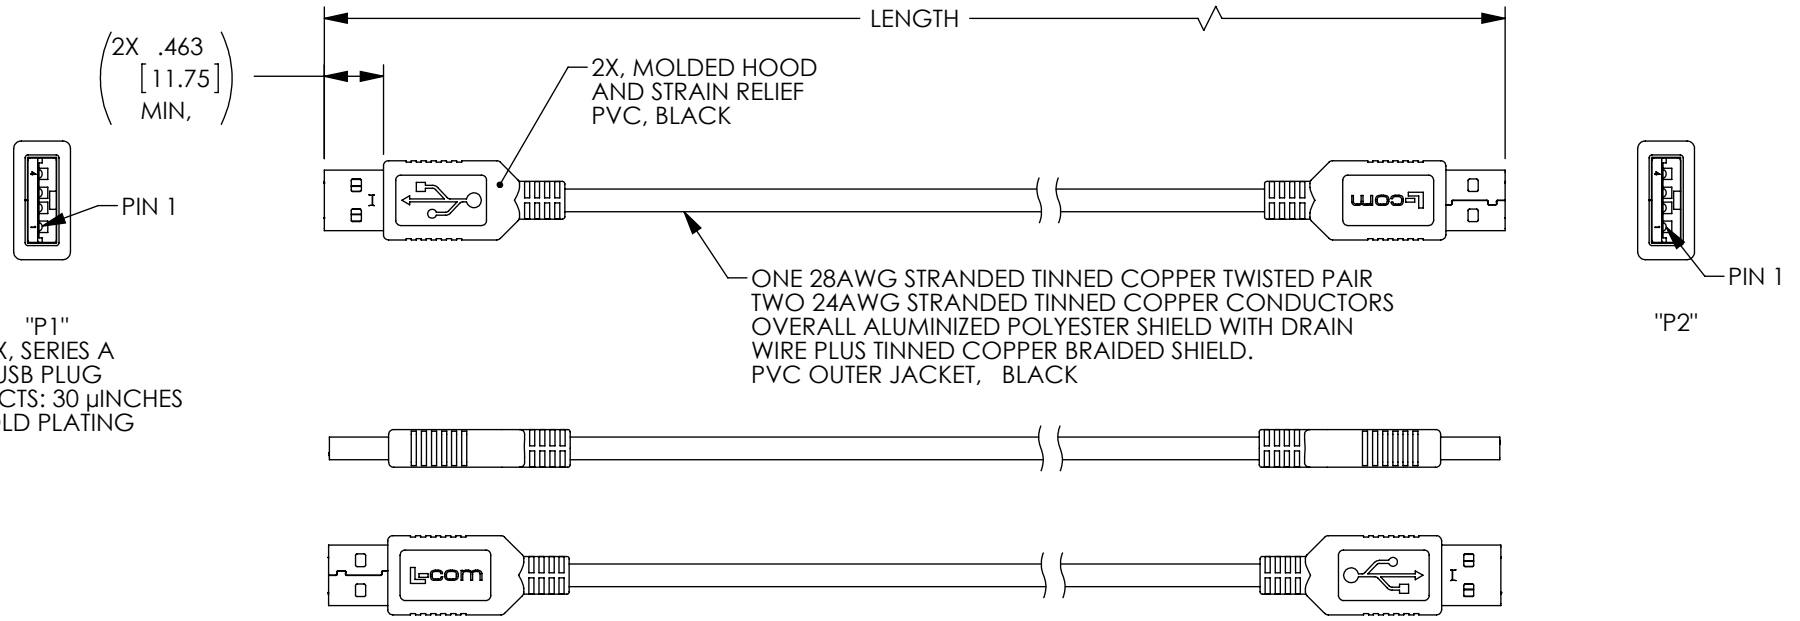

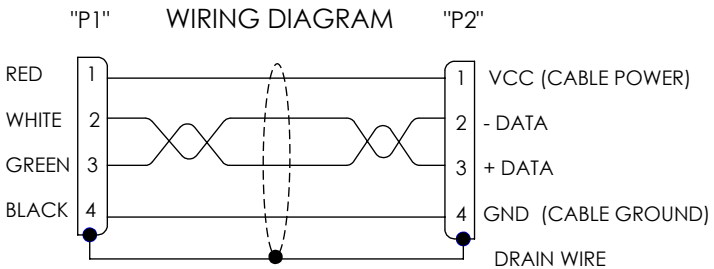

PART NUMBER	LENGTH	
	METERS	FEET
CAUBLKAA-03M	0.3	[.98]
CAUBLKAA-05M	0.5	[1.64]
CAUBLKAA-075M	0.75	[2.46]
CAUBLKAA-1M	1.0	[3.28]
CAUBLKAA-2M	2.0	[6.56]
CAUBLKAA-3M	3.0	[9.84]
CAUBLKAA-4M	4.0	[13.12]
CAUBLKAA-5M	5.0	[16.41]

NOTES:

1. CABLE ASSEMBLIES ARE CONSTRUCTED TO MEET USB 2.0 REQUIREMENTS.
2. CABLE ASSEMBLIES SHALL HAVE 360° SHIELD TERMINATION.
3. CONNECT DRAIN WIRE TO CONNECTOR SHELLS.
4. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY D.FRISIELLO	10/28/13
CHECKED BY D.DESJARDIN	10/28/13
APPROVED BY S. SMITH	10/28/13

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CBL,USB A/A BLK

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CAUBLKAA	A

SCALE: NONE | CAD FILE: CAUBLKAA.SLDDRW | SHEET 1 OF 1