GLX420800UL

FOURTH POLE ADD-ON, SIMULTANEOUS CLOSING OPERATION AS SWITCH DISCONNECTOR POLES, UL98. FOR GL0800C1UL VERSION



Product designation				Fourth pole
Product type designation				GLX42
Number of poles			Nr.	1
Operating voltage type				AC
Contact characteristics				
IEC Conventional free air thermal current Ith ≤ 40°C			A	800
Rated insulation voltage Ui IEC/EN			V	1000
Rated impulse withstand voltage Uimp			kV	12
Operating current Ie				
	AC21A			
		400V	A	800
		500V	A	800
		690V	A	800
	AC22A			
		400V	A	800
		500V	A	800
		690V	A	800
	AC23A			
		400V	A	800
		500V	A	800
		690V	A	800
Power dissipation per pole max			W	40
Rated operational power AC23A				
		400V	kW	560
		690V	kW	800
Making capacity AC23A 400V			A	8000
Breaking capacity AC23A 400V			A	6400
Mechanical life			cycles	5000
Mechanical features				
Operating position				
		normal		Vertical plan
		allowable		Any
Terminals				
		type		M12 x 40
Tightening torque for terminals				
		min	Nm	50
		max	Nm	75
		min	lbin	442
		max	lbin	664
Conductor section				
		IEC min	mm²	2x185
		AWG/kcmil min		2
		AWG/kcmil max	kcmil	4x600
UL technical data				
UL Standard				UL98

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

GLX420800UL

FOURTH POLE ADD-ON, SIMULTANEOUS CLOSING OPERATION AS SWITCH DISCONNECTOR POLES, UL98. FOR GL0800C1UL VERSION

General purpose current rating		A	800
UL Terminal kit lugs			GL506-GL507

Ambient conditions

Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Max altitude		m	3000

Dimensions

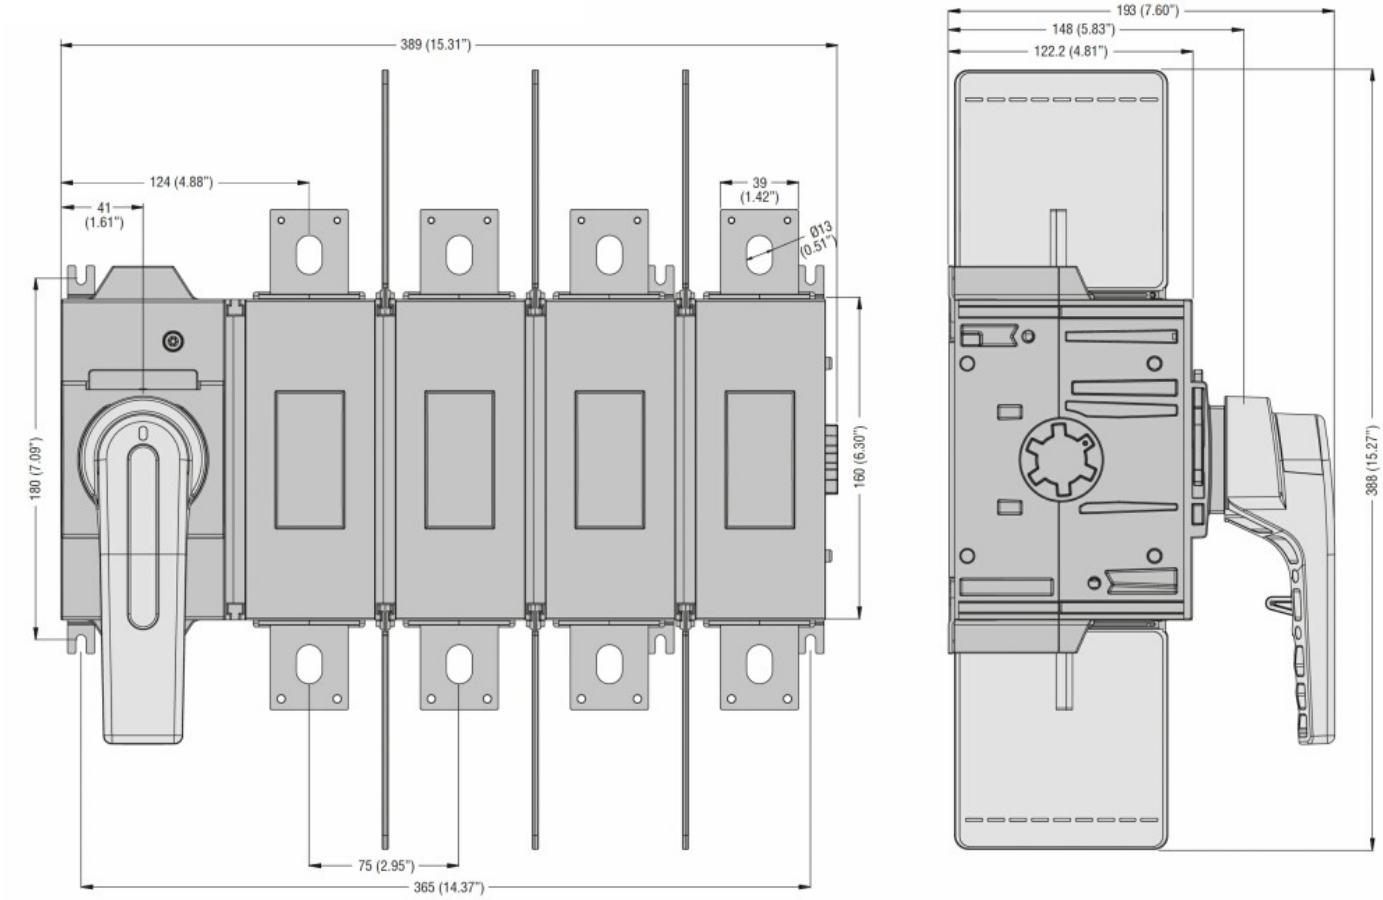

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-3

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Certifications

cULus

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low-voltage switch technology

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding