DA series

Right Angle Dual in Line Switches

General

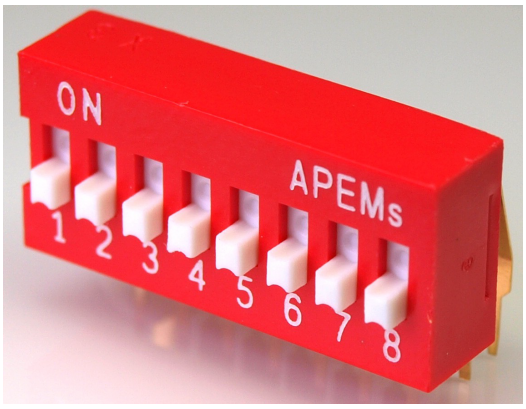

- ❑ Raised actuators
- ❑ Even and odd pole numbers
- ❑ Right Angle
- ❑ Gold contacts for high reliability
- ❑ Halogen Free, LEAD FREE, RoHS Compliant

General Specifications

- Contact Rating 25mA 24VDC
- Contact Resistance 50mΩ max.
- Insulation Resistance 100MΩ min, 500VDC
- Dielectric Strength 500VAC/1 Minute
- Operating Force 1000gf max
- Travel 2mm
- Operating Life 2,000 Cycles
- Operating Temperature -20°C to +70°C
- Storage Temperature -40°C to +85°C

Materials

- Case: Black glass fibre filled PBT
- Cover: Red glass fibre filled PBT
- Actuator: White glass fibre filled PBT
- Terminals/contact: Gold plated phosphor bronze
- Terminal seal: Epoxy
- Tape seal: Polyester film
- UL94-V0

Packaging

- IC Tube (see chart on the next page)

Overview

Model No	No. pos.	Dim "A"	Dim. "B"
DA-02	2	6,44 (.253)	2,54 (.100)
DA-03	3	8,89 (.350)	5,08 (.200)
DA-04	4	11,52 (.453)	7,62 (.300)
DA-05	5	14,06 (.553)	10,16 (.400)
DA-06	6	16,60 (.653)	12,70 (.500)
DA-07	7	19,14 (.753)	15,24 (.600)
DA-08	8	21,68 (.853)	17,78 (.700)
DA-09	9	24,22 (.953)	20,32 (.800)
DA-10	10	26,76 (1.053)	22,86 (.900)
DA-12	12	31,84 (1.253)	27,94 (1.100)

Top tape sealed : add "T" after model number.

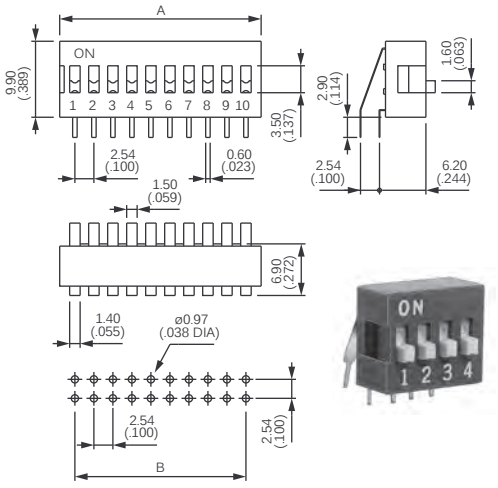

Note: The company reserves the right to change specifications without notice.

DA series

Right Angle Dual in Line Switches

Overview Cont



SERIES

Number of Ways

02	Two way
03	Three way
04	Four way
05	Five way
06	Six way
07	Seven way
08	Eight way
09	Nine way
10	Ten way
12	Twelve way

Tape Seal

Blank	No tape
T	Top tape seal

RoHs Compliance

V	(std) RoHS & lead free

Packaging

- Supplied in standard IC tubes

DA-02 73pcs	DA-02-T 70pcs
DA-03 52pcs	DA-03-T 50pcs
DA-04 40pcs	DA-04-T 39pcs
DA-05 33pcs	DA-05-T 32pcs
DA-06 28pcs	DA-06-T 28pcs
DA-07 24pcs	DA-07-T 24pcs
DA-08 21pcs	DA-08-T 21pcs
DA-09 19pcs	DA-09-T 19pcs
DA-10 17pcs	DA-10-T 17pcs
DA-12 14pcs	DA-12-T 14pcs