
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

B RoHS Compliant ✔

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | RELEASED FOR CN PRODUCTION | 12/3/07 | D.CASTRO |
| B | ECN 5673: NEW FORMAT, ADDED ROHS, REVISED PACKING NOTE | 8/18/11 | D.FRISIELLO |
| | | | |
| | | | |

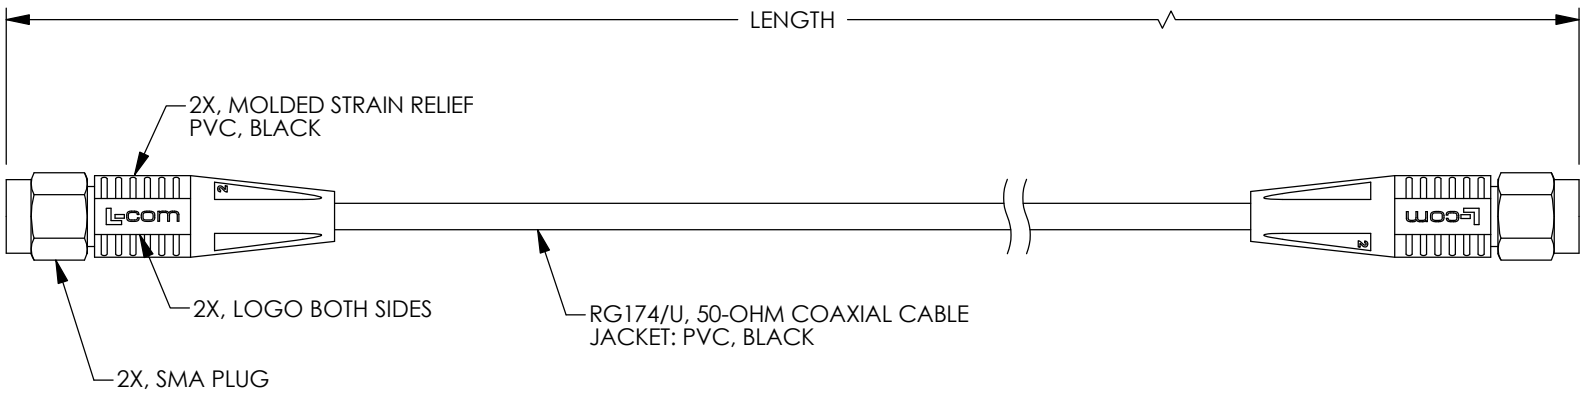


| PART NUMBER | LENGTH FEET [METERS] |
|---|---|
| CC174S-05 | 0.5 [.15] |
| CC174S-1 | 1.0 [.30] |
| CC174S-1.5 | 1.5 [.46] |
| CC174S-2 | 2.0 [.61] |
| CC174S-2.5 | 2.5 [.76] |
| CC174S-3 | 3.0 [.91] |
| CC174S-4 | 4.0 [1.22] |
| CC174S-5 | 5.0 [1.52] |
| CC174S-7.5 | 7.5 [2.28] |
| CC174S-10 | 10.0 [3.05] |

B
NOTES:

1. CABLE SHALL BE TESTED FOR CONTINUITY.
2. CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY D.CASTRO | 12/3/07 |
| CHECKED BY D.FRISIELLO | 12/4/07 |
| APPROVED BY D.DOLCE | 12/4/07 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY
COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
CA SMA M /SMA M RG174/U

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 43321 | CC174S | B |

SCALE: NONE | CAD FILE: CC174S.SLDDRW | SHEET 1 OF 1