Powering Business Worldwide

Instruction Leaflet
Montageanweisung
Notice d'installation
Instrucciones de montaje
Istruzioni per il montaggio
安装说明
Инструкция по монтажу
Montagehandleiding
Montagevejledning
Οδηγίες εγκατάστασης
Instruções de montagem
Monteringsanvisning
Asennusohje
Návod k montáži
Paigaldusjuhend
Szerelési utasítás
Montāžas instrukcija
Montavimo instrukcija
Instrukcja montażu
Navodila za montažo
Návod na montáž
Монтажни инструкции
Instrucțiuni de montaj
Upute za montažu
Kullanma Talimatı
Инструкција за монтажу
Intruksjonsblad
Монтажна інструкція
نشرة التعليمات

FRCmM-NA

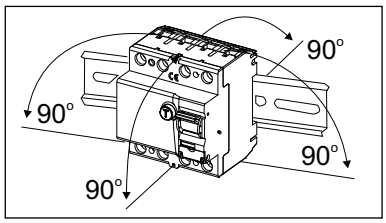

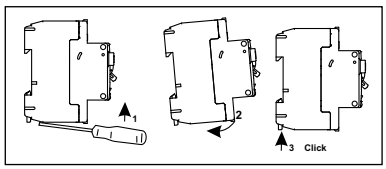

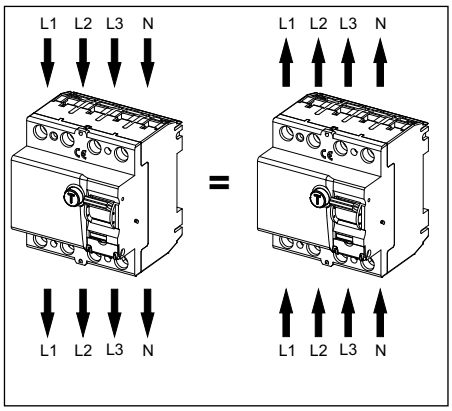

Maximum back-up fuse/Max. zulässige Vorsicherung
I_n = 25-63A 63 A gG/gL

1, 2, 3, 4, 5, 6, N, N:

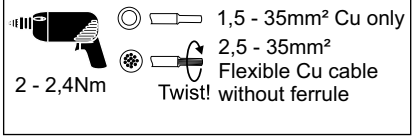

1,5 - 35mm² Cu only
2,5 - 35mm² Flexible Cu cable without ferrule

Extension UL1053 RCD:	
Supplementary Protector Technical Data	USA/Canada UL 1053
3 phase (series-fuse 63 A): 5 kA - 480Y/277V ~ 60 Hz (fault current)	at 30°C Cu 75°C, min. AWG 14, max. AWG 6, Nm 4

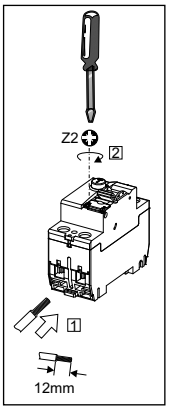

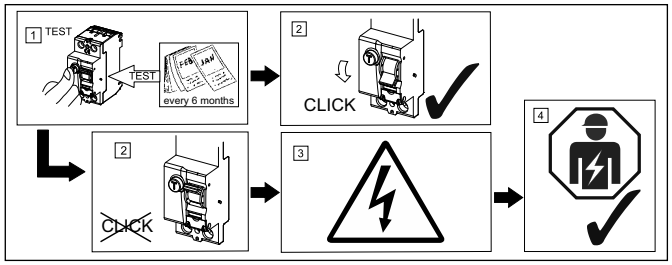

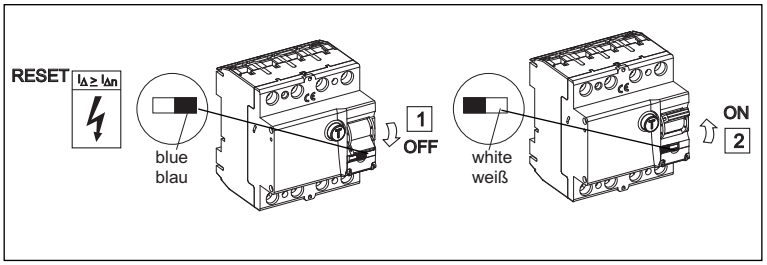

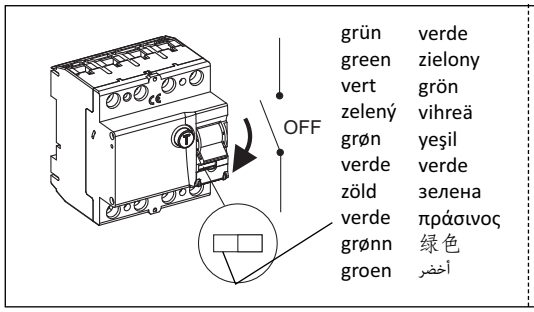

grün	verde
green	zielony
vert	grön
zelený	vihreä
grøn	yeşil
verde	verde
zöld	зелена
verde	πράσινος
grønn	绿色
groen	أخضر



rot	vermelho
red	czerwony
rouge	röd
červený	punainen
rød	kırmızı
rojo	roșu
vörös	црвена
rosso	κόκκινος
rød	红色
rood	أحمر

Connection/Anschluss:



Eaton Industries (Austria) GmbH, Eugenia 1, 3943 Schrems, Austria
© 2019 by Eaton Industries (Austria) GmbH, www.eaton.eu/documentation
www.eaton.com/recycling
MA-FRCmM-NA.qxd / 12.2019g / IL019008ZU / 180503312
All Rights Reserved / Printed in Austria

FRCmM-NA

4-pole acc. to IEC61008

30mA Types / Typen:



3+N

(240/415V AC) IEC



2-pole
2-polig
(240V AC) IEC



3-phase application without N
3-phasige Anwendung ohne N
(240V AC Phase-Phase) IEC



Not allowed

3-phase application without N
3-phasige Anwendung ohne N
(415V AC Phase-Phase) IEC



3-phase load without N
3-phasige Last ohne N
(415V AC Phase-Phase) IEC

300mA Types / Typen:



3+N

(240/415V AC) IEC



2-pole
2-polig
(240V AC) IEC



3-phase application without N
3-phasige Anwendung ohne N
(240/415V AC Phase-Phase) IEC



3-phase load without N
3-phasige Last ohne N
(415V AC Phase-Phase) IEC

4-pole acc. to UL1053

30, 300mA Types / Typen:



3+N

(480Y/277V AC) UL



2-pole
2-polig
(277V AC) UL



3-phase application without N
3-phasige Anwendung ohne N
(480Y/277V AC Phase-Phase) UL

FRCmM-NA-110

30, 300mA Types / Typen:



3+N

(110/190V AC) IEC
(208/120V AC) UL



2-pole
2-polig
(110V AC) IEC
(120V AC) UL



3-phase application without N
3-phasige Anwendung ohne N
(110/190V AC Phase/Phase) IEC
(208/120V AC Phase/Phase) UL



3-phase load without N
3-phasige Last ohne N
(190V AC Phase/Phase) IEC
(208V AC Phase/Phase) UL

Eaton Industries (Austria) GmbH, Eugenia 1, 3943 Schrems, Austria
© 2019 by Eaton Industries (Austria) GmbH, www.eaton.eu/documentation
www.eaton.com/recycling
MA-FRCmM-NA.qxd / 12.2019g / IL019008ZU / 180503312
All Rights Reserved / Printed in Austria