TORQUE SCREWDRIVERS

Series A.400

2 Production models:
Preset on a bench



2 Maintenance models:
Set by Vernier



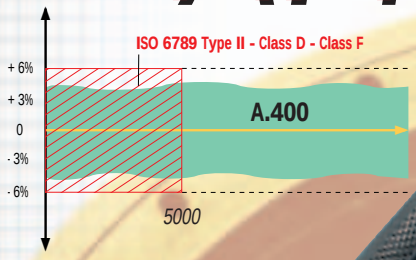

Vernier scale: clear and legible

Ergonomic profile for immediate grip position

Protected setting system: no accidental setting alteration.

Flat surface : does not roll on the worktop

Bit holding device ∅1/4"

- **Accuracy - conforms to international standards ISO 6789 specifying ± 6%.**
- **Reliable for over 50,000 operations.**
- **Automatic release at preset torque.**
- **Automatic resetting.**
- **Ergonomics: firm grip, light.**

FIELDS OF APPLICATION
Examples of use



- Telecommunication wiring and networks.
- Telephone exchanges.
- Mobile telephones.
- Satellites.



- Instrument panels.
- Wiring panels.
- Computer connections.
- Aircraft tyre valves.



- Industrial manufacturing and maintenance.
- Electrical engineering.
- Household appliance assembly.
- Precise torque applications.



- Fitting airbags.
- Belt pre-tensioner.
- Injection systems.
- Air conditioning systems.
- Dashboard.
- Pressure sensor tyre valves.



- Micro-electronics.
- Computing.
- PC assembly.
- Computer networks.

LOW TORQUE VALUE 0,5 ▸ 10Nm

- Exceeds the ISO 6789, DIN ISO 6789, NF EN 26789 standards.
- Class II type D (A.400 maintenance) and type F (A.440 production).
- Single direction screwdriver, right-hand torque tightening direction.
- Female hex adapter to use with ∅1/4" bit.
- ECR ∅1/4" - ☐1/4" adapter for sockets and accessories.
- Easy use: simplified vernier for easy setting.
- ☐1/4" drive on the handle for use with a ratchet handle type A.300PA.
- Supplied with inspection report, setting wrench, and individual ID number.

PRODUCTION

Preset screwdriver



	TORQUE	L	
A.442	0,5 Nm ▸ 2,5 Nm	147 mm	280 g
A.444	2 Nm ▸ 10 Nm	147 mm	400 g

MAINTENANCE

Vernier screwdriver



	TORQUE	GRADUATION	L	
A.402	0,5 Nm ▸ 2,5 Nm	0,1 Nm	147 mm	280 g
A.404	2 Nm ▸ 10 Nm	0,5 Nm	147 mm	400 g

SETS



	SET OF ∅1/4" DRIVER BITS
A.402J2	Screwdriver A.402
0,5 ▸ 2,5 Nm	Bit driver EF.1P4
	Handle A.300PA
	Adjustment spanner A402-20
	4,5 - 6,5 - 8 mm
	PZ 1 - 2 - 3 mm
	3 - 4 - 5 mm

	SET OF ∅1/4" DRIVER BITS
A.404J2	Screwdriver A.404
2 ▸ 10 Nm	Bit driver EF.1PA
	Handle A.300PA
	Adjustment spanner A404-20
	4,5 - 6,5 - 8 mm
	PZ 1 - 2 - 3 mm
	4 - 5 - 6 mm



	SET OF ☐1/4" SOCKETS
A.402J1	Screwdriver A.402
0,5 ▸ 2,5 Nm	Adapter ECR
	Extensions R.210 and R.215
	Handle A.300PA
	Adjustment spanner A402-20
	Socket R.3,2-4-5-5,5-6-7-8-9-10 mm

	SET OF ☐1/4" SOCKETS
A.404J1	Screwdriver A.404
2 ▸ 10 Nm	Adapter ECR
	Extensions R.210 and R.215
	Handle A.300PA
	Adjustment spanner A404-20
	Socket R.3,2-4-5-5,5-6-7-8-9-10 mm

FACOM TORQUE CONTROL