484 - Twin slip-joint multigrip pliers




Standards:

NF ISO 8976, ISO 8976, DIN ISO 8976, ASME B107.500

Description:

- Inter-slotted jaws distribute load either side of central pin.
- 2 heavy-gauge slots for optimum safety and durability.
- 7 positions.
- Capacity: - 484A: 34 mm. - 484A.30: 43 mm.
- Finish: satin surface.

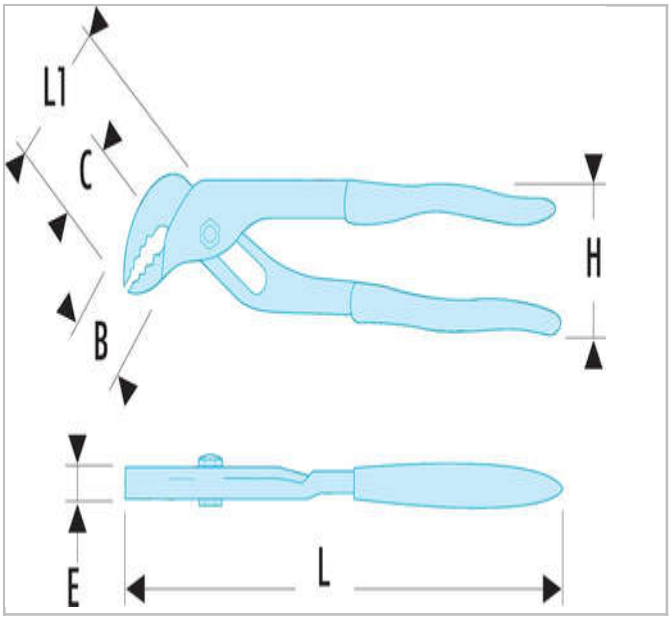

© FACOM 2020

	A [mm]	Length L [mm]	Length L1 [mm]	Thickness E [mm]	Head Height C [mm]	Head Width B [mm]	Weight [g]	Height H [mm]
484A	33.0	240.0	60.0	7.0	38.0	33.0	345.0	50.0
484A.30	38.0	300.0	66.0	9.5	40.0	38.0	560.0	52.0

© FACOM 2020