COMPACT SEMICONDUCTOR FAN HEATER

CSL 028 | 350 W



Art.-No. 02810.2-01
(Standardversion: 02810.0-**01**)

TECHNICAL DATA

Operating Voltage	48 V DC (min. 36 V DC; max. 56 V DC)
Connection	2-pole clamp max. 2.5 mm² clamping screw torque 0.8 Nm max
Heating capacity[1)]	350 W
Mounting	Screw fixing (Ø 5.3 mm)
Surface temperature	max. +80 °C (176 °F); except upper protective grille at +20 °C (68 °F) ambient temperature
Axial fan, ball bearing	air flow, free flow 54 m³/h service life (L10) 70,000 h at +40 °C (+104 °F)
Inrush current max.	26.0 A
Recommended pre-fuse T (time-delay)	16.0 AT
Dimensions (H x W x D)	90 x 85 x 111 mm
Operating / Storage temperature	-20 to +70 °C (-4 to +158° F) / -20 to +70 °C (-4 to +158 °F)
Protection class	III (double insulated)
Weight (approx.)	0.4 kg
Approvals:	EAC

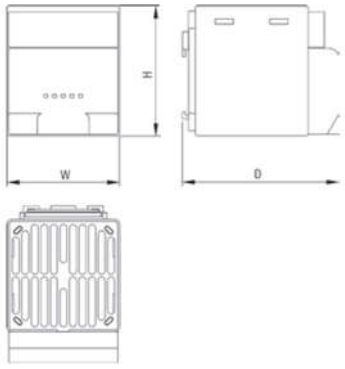

[1)] at +20°C (+68 °F) ambient temperature