113A.T - Phosphated adjustable wrenches




Standards:

NF ISO 6787, ISO 6787, DIN 3117, ASME B107.100

Description:

- Good access to the button = easy setting.
- Non-protruding moving jaw at maximum capacity.
- Pre-adjustment of jaw opening thanks to millimetric gradation.
- Left-hand button rotation.
- Range from 4" to 24".
- Presentation: phosphated body and "fine ground" head faces.

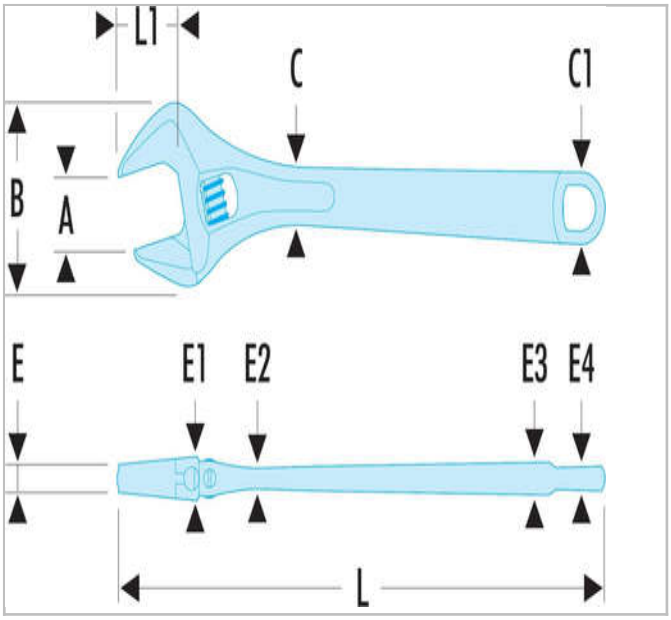

© FACOM 2020

	A [mm]	Length L [mm]	Length L1 [mm]	Thickness E [mm]	Thickness E1 [mm]	Thickness E2 [mm]	Thickness E3 [mm]	Thickness E4 [mm]	Head Height C [mm]	Head Height C1 [mm]	Head Width B [mm]	Weight [Kg]
113A.10T	30.0	255.0	29.0	9.0	15.5	9.5	12.7	10.0	21.5	28.5	69.5	0.48
113A.12T	34.0	306.0	34.0	10.0	18.0	10.2	13.0	10.0	25.0	31.0	80.0	0.7
113A.15T	44.0	380.0	44.0	13.5	20.0	12.0	14.8	11.5	28.0	35.0	97.0	1.2
113A.18T	53.0	456.0	53.0	16.0	22.5	14.3	17.8	13.5	31.0	38.5	115.0	1.8
113A.24T	62.0	612.0	61.0	17.0	31.0	17.0	15.0	15.0	42.0	38.0	132.0	3.27
113A.4T	13.0	114.0	13.0	4.5	9.5	5.0	6.5	5.0	11.0	14.0	34.0	0.065
113A.6T	20.0	155.0	19.0	5.0	11.8	6.0	8.3	5.8	14.8	18.5	45.0	0.125
113A.8T	27.0	206.0	24.0	6.5	13.5	9.0	11.0	8.5	18.5	24.0	61.5	0.275

© FACOM 2020