
Pomona ELECTRONICS

Technical Data Sheet

Model 5534
Static Control Ground Cord

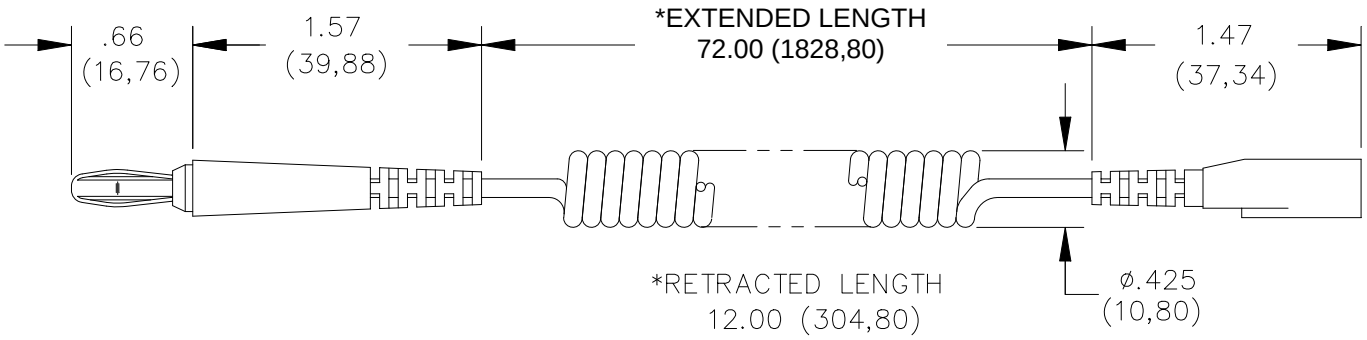

Materials

Connector: 1st End – Standard Banana Plug
- Spring: Beryllium Copper Alloy QP2.0
- Plug Body: Brass Alloy 87-75% Hard
- Finish: Nickel-plated per QQ-N-290, Class 2, 150 microinches
- Insulation: PVC, color: black
- Coiled Cord – Coiled tinsel cord, 2 bundles, 7 tinsel of bare copper, Polyurethane jacket 2.25mm O.D.

Connector: 2nd End – 3.18 (1/8) Snap Receptacle – Brass
- Finish: Nickel-plated
- Insulation: PVC, color: black

Molded-In Resistor: 1 megohm ± 10%, ¼ Watt, Carbon Film

Ratings

Operating Temperature: +50ºC (+122ºF) Max

Ordering Information

Model: 5534
Static Control Ground Cord

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2010 D1094353 Rev. 100