

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/18/08	D.GRIFFIN
B	ECN 4308: ADDED VOLTAGE, AMP AND PACKAGING NOTES	10/12/09	D.FRISIELLO
C	ECN 5463: ADDED PANEL CUTOUT	4/26/11	D. CASTRO

WIRING TABLE	
DB15 F	TERMINAL BLOCK #
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
GROUND	16




DB15 FEMALE
D-SUB
CONNECTOR

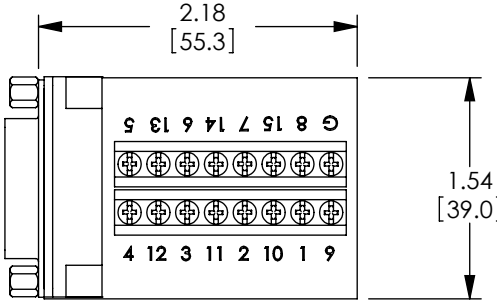

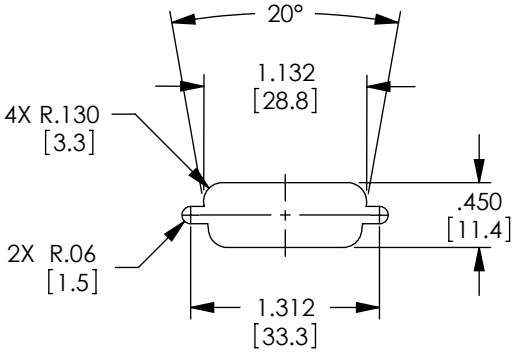

RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

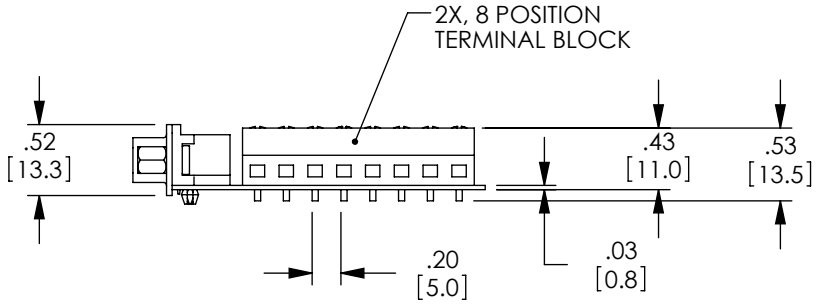

RoHS Compliant ✔

NOTES:

VOLTAGE RATING: 1000V AC AND 500V DC.
CURRENT RATING: 3 AMPS

COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2
.XX = ± .02
.XXX = ±.005
PROJECTION

APPROVALS		DATE
DRAWN BY	D/FRISIELLO	12/18/08
CHECKED BY	D.FORTIN	12/18/08
APPROVED BY	S.SMITH	12/18/08

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: DATA

PRODUCT DESCRIPTION: FIELD INSTALLABLE DGB15FT

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	DGB15FT	C

SCALE: NONE | CAD FILE: DGB15FT.SLDDRW | SHEET 1 OF 1