

RoHS Compliant

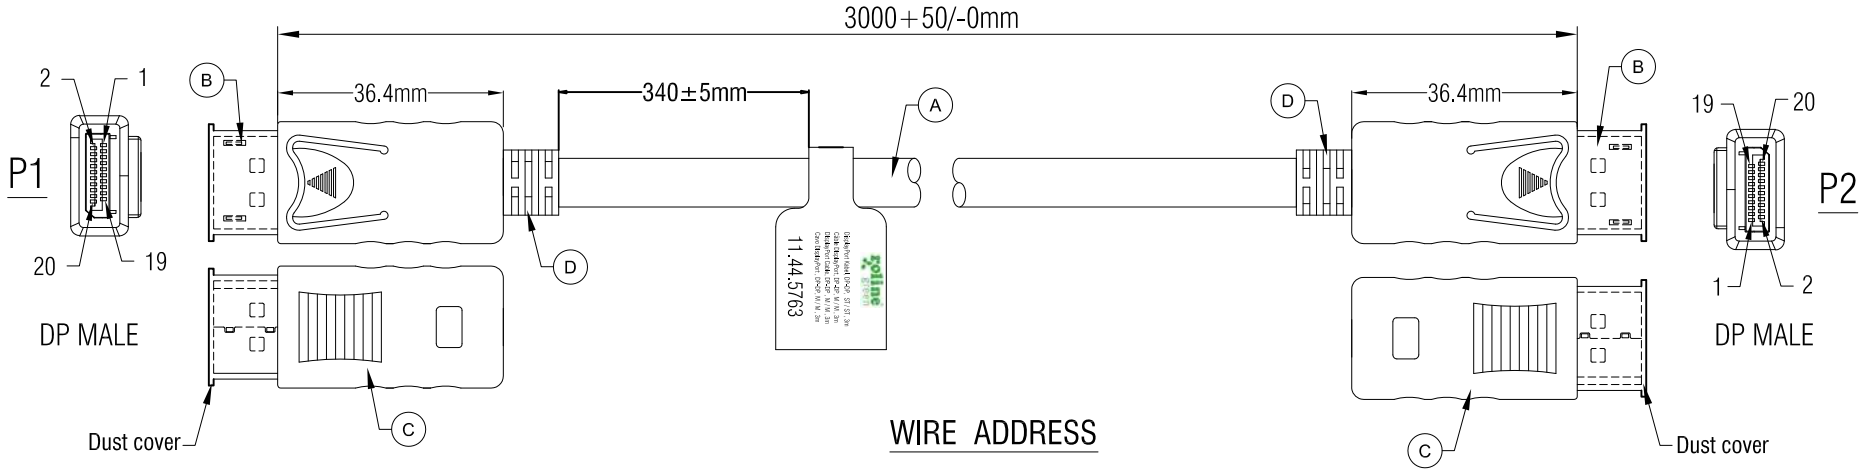

WIRE ADDRESS

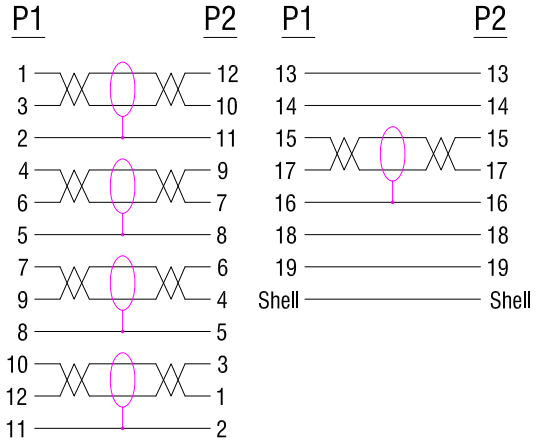

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5MΩ MIN.
4.HI-POT:300V DC/10MS.
5.Real Test Passed 3840*2160P 60Hz.
6.Real Test Not Twinkling,Double Vision and Decolor.

NUMBER	PRODUCT SPECIFICATIONS	Quantity	Unit
D	85A TPE BLACK		G
C	DisplayPor 20P MALE BLACK ABS SHELL		G
B	DisplayPor 20P MALE(Black Insulator, Nickel Plated)	2	PCS
A	UL21445 (30#*1P+DAM)*5+30#*4C+ADB,OD=6.0mm,BLACK TPE JACKET	1	PCS

ROLINE GREEN DisplayPort Cable, DP - DP, M/M, 3m

Item	11.44.5763	
Draw	Kobe	Date: 2021.07.20
Approval		
Duty	F16	
Sample NO.		

SECOMP

Drawings of 1 (2) | Proportion: 1:1 | Unit(mm) | A4